

# COUPLERS & SPLITTERS

## Cat5e / Cat6 Right-angle Keystone Coupler



Right-angle Cat5e or Cat6 coupler for use with keystone patch panels or keystone wall plates. Allows ready-made patch cords to be used in fixed installations eliminating the use of solid cable, IDC terminations and tools. Can also be fitted to Australian HPM and Clipsal flush plates by using Clipsal and HPM keystone bezels (DATAMASTER P4590 Clipsal and P4592 HPM) The 1-1 wiring configuration is compatible with both T568A and T568B wiring schemes. Colour is white.

CAT #	TYPE	COLOUR
P2324-006	Cat-6	White
P2324	Cat-5E	White

## Cat5e Keystone Coupler



Cat5e coupler for use with Keystone patch panels, and flush plates. Allows ready-made Cat5e patch cords to be used in fixed installations eliminating the use of IDC terminations and tools. Can also be fitted to Australian HPM and Clipsal flush plates by using Clipsal and HPM keystone bezels (DATAMASTER P4590 Clipsal and P4592 HPM) The 1-1 wiring configuration is compatible with both T568A and T568B wiring schemes. Colour is black.

CAT #	COLOUR
P2363-B5E	Black


## Cat6 Keystone Coupler



Cat6 coupler for use with Keystone patch panels, and flush plates. Allows ready-made Cat6 patch cords to be used in fixed installations eliminating the use of IDC terminations and tools. Can also be fitted to Australian HPM and Clipsal flush plates by using Clipsal and HPM keystone bezels (DATAMASTER P4590 Clipsal and P4592 HPM) The 1-1 wiring configuration is compatible with both T568A and T568B wiring schemes. Colour is black.

CAT #	COLOUR
P2363-B60	Black

## Modular to D-sub Adaptor

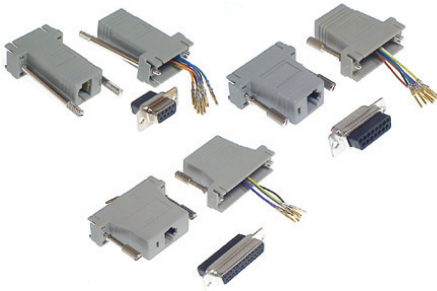

Adapts male or female DB9, DB15 or DB25 connectors plugs to 8 position RJ45 or 6 position RJ11 modular socket. Back shell is pre-wired to modular socket ready to insert pins into desired positions of the DB connector.

CAT #	DB SIZE	DB GENDER	TYPE	COLOUR
P0809	DE-09S (DB9)	Female	8P8C	Grey
P0810	DE-09P (DB9)	Male	8P8C	Grey
P0815	DB-15S (DB15)	Female	8P8C	Grey
P0816	DB-15P (DB15)	Male	8P8C	Grey
P0825	DB-25S (DB25)	Female	8P8C	Grey
P0826	DB-25P (DB25)	Male	8P8C	Grey
P0820	DB-25S (DB25)	Female	6P6C	Grey
P0821	DB-25P (DB25)	Male	6P6C	Grey

## Cat5e/6 Coupler



Cat5e/Cat6 coupler can be used to link 2 patch cords together or as a gender changer. The 1-1 wiring configuration is compatible with both T568A and T568B wiring schemes. Colour is white.

CAT #	COLOUR	TYPE
P2325	White	Cat-5E
P2326	White	Cat-6

## Cat6 In-line Punch Down Coupler



In-line Coupler Punch Down is a surface mounted Cat6 coupler block with punchdown terminals suitable to join or extend solid Cat6 cable.

CAT #	COLOUR
P2327	Black

## Y-Terminals



Insulation displacement Y-terminals for use when connecting telephone line cords to screw terminals. Folded tips hold the terminal captive while the screw is tightened. Available in packs of 10, 150 or bulk.

CAT #	QUANTITY
P1100	10 Pack
P1110	150 Pack
P1111	Bulk

## H1130 Quick Connect Crimps



H1130 insulation displacement quick connect crimps, used for connection of insulated line cord conductors to telephone plug types 603, 604, 605, 606 and 615. Single form, packed in poly bags of 10. Also available in continuous form 20K reels.

CAT #	QUANTITY
P1130	10 Pack

## Gel Connectors



Gel filled, IDC, insulated, butt connector for 2 or 3 solid copper conductors of 19 to 26 AWG having maximum insulation OD of 2.08mm. Simple crimp-connection using our gel-connector crimp tool T0037 for fast, easy and reliable installation. Contains moisture resistant sealant, rated to IP67 (dust resistant and immersible up to 1 metre).

CAT #	WIRES	CAP COLOUR	TYPE
P8632	2	Yellow	UY2
P8633	3	Red	UR2