

# Catalogue No: CA7-40E-M-40-24VDC

## CONTACTOR 20kW 4P 24V DC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 4 Pole Contactors with DC Coil



Contactor 4 pole 40A 20KW 4N/O 24V DC electronic Coil



Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS

Product Series	CA7-40
Component Type Motor Control and Drives	Standard Contactor
I <sub>e</sub> , Rated Operational Current, AC-1, 415V, 40°C	75 A@415V,40°C
kW Rating, AC-3, 415V, 60°C	20 kW @415V, 60°C
I <sub>e</sub> , Rated Operational Current, AC-3, 415V, 60°C	37 A@415V,60°C
kW Rating, AC-3, 690V, 60°C	18.5 kW @690V, 60°C
I <sub>e</sub> , Rated Operational Current, AC-3, 690V, 60°C	9 A@690V,60°C
Number of Poles	4
Contact Configuration, Main Poles	4 NO main poles
Coil Type	Electronic type
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 12VDC	16 W 25
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 24VDC	16 W 25
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 36-48VDC	16 W 25
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 48-72VDC	16 W 25
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 110-125VDC	16 W 26
Coil Consumption Pickup W Ave/Peak DC Electronic coiled contactors 220-250VDC	18 W 29
Main Poles	4 N/O
Integrated Aux	No Auxiliary Contacts
Coil Voltage, DC, Nom	24 V DC
IP Rating	IP20

# Catalogue No: CA7-40E-M-40-24VDC

## CONTACTOR 20kW 4P 24V DC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7 Contactors 4 to 55kW > 4 Pole Contactors with DC Coil



### REFERENCES

IECEX Certificate -


Supplier Declaration of Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue & Product Selection: -

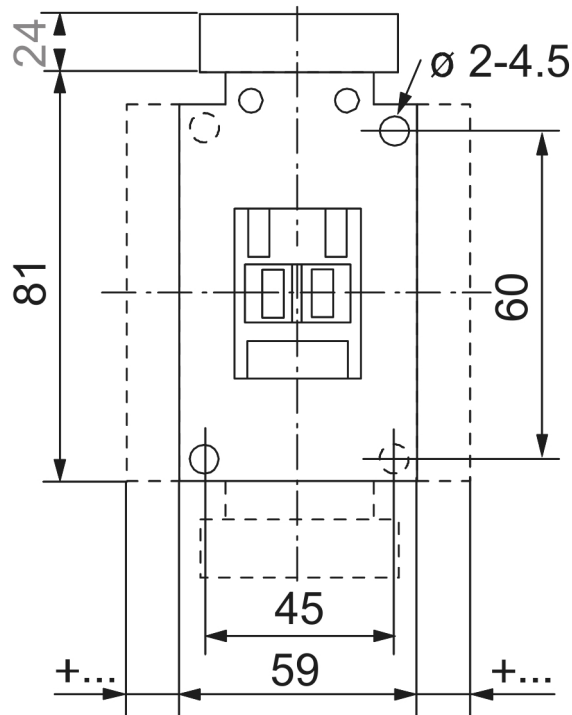

Dimension Diagram