



Representative Photo Only
(actual product may vary based on configuration selections)

ISO Toggle Switch 250A 4 Pole with red toggle

- Compact size minimizing the size of the enclosure needed saving both space and money
- DIN-rail mounting across all Katko ISO switches making these switches very quick and easy to install
- Switch technology by means of silver contacts ensuring safe and durable operation
- 4 pole versions feature early-make and late-break neutral pole preventing over voltages which can be caused by the late closing of the neutral

SPECIFICATIONS

Number of Poles	4
Ie, Rated Operational Current, AC-21a, 415V	250 A@415V
Ie, Rated Operational Current, AC-21a, 690V	250 A@690V
Ie, Rated Operational Current, AC-23b, 400V	200 A@400V
Ie, Rated Operational Current, AC-23b, 415V	200 A@415V
kW Rating, AC-23a, 415V, 3ph	90 kW @415V
kW Rating, AC-23a, 690V, 3ph	90 kW @690V
kW Rating, AC 23b, 415V, 3ph	90 kW
M Rating (AS 3133)	M1600 AS 3133
Wire / Conductor Size, Flex Cable, Max	120 mm ² max

REFERENCES


IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **EVA4250H**

TOGGLE ISO SWITCH 4P 250A WITH RED TOGGLE

Power Distribution and Protection > Isolators and Transfer Switches > Load Break Switches > Katko ISO Safety Switches > Katko Toggle Operated Switches

NHP

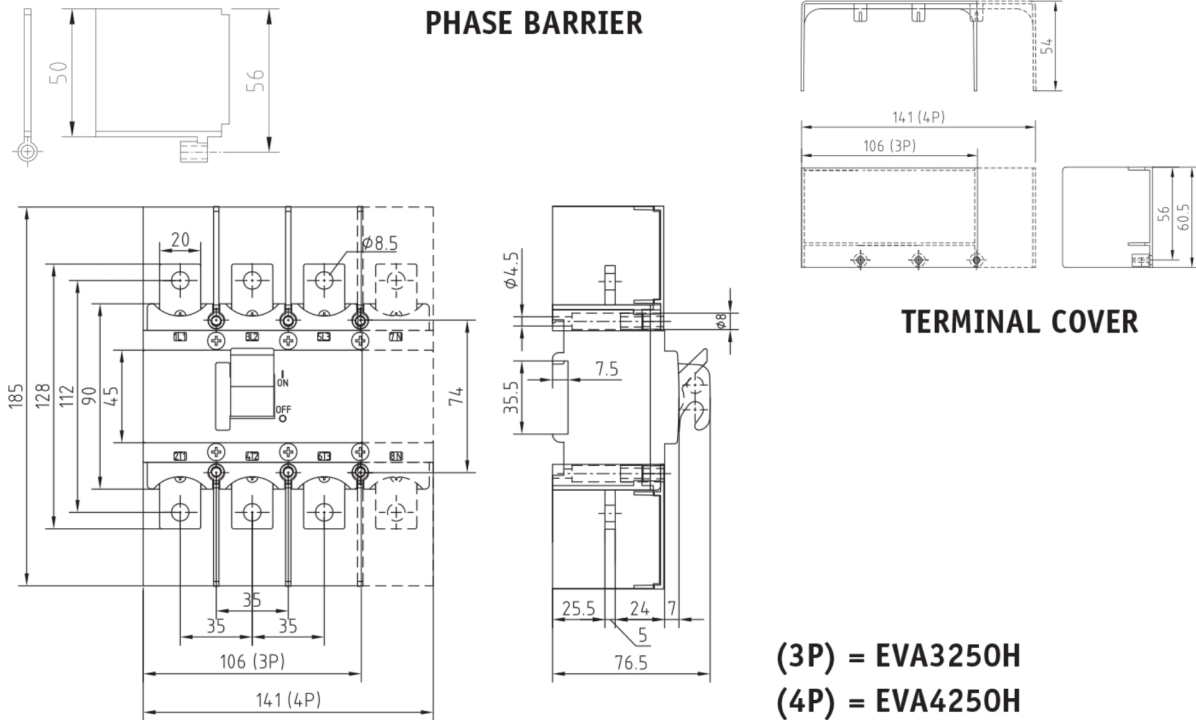

Dimension Diagram