


Catalogue No: **GB212183TF**

CHASSIS GB DINT 250A 12WAY 3P TF

Power Distribution and Protection > Busbar, Chassis and Power Connections > Chassis > GB (Grizz-Bar) Isolation Chassis > GB Chassis 3 Pole > 250A (18mm Pole Pitch)

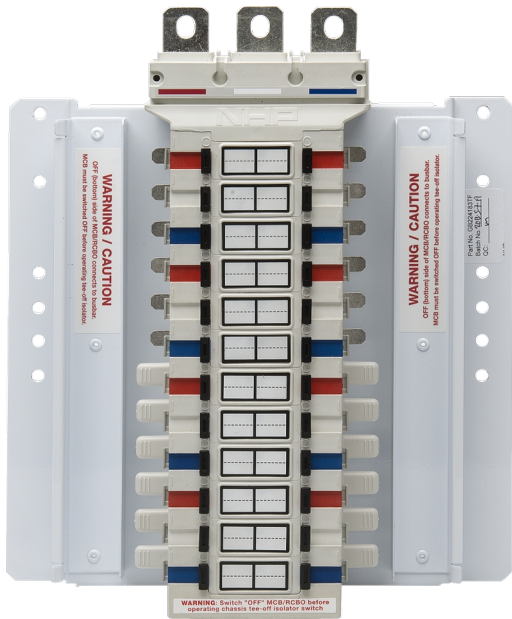

Representative Photo Only
(actual product may vary based on configuration selections)

Busbar Chassis GB to suit Din-T 250A 12W 3Pole Top feed

- Complies with AS/NZS 61439, AS/NZS 3000 – 2018
- Main bars rated 250 A 3 pole (3 phase)
- Each tee-off has an inbuilt interlocked isolation switch for user safety
- Isolation switch per tee-off rated AC20
- Encapsulated busbar (no insulation coating required)
- Withstand ratings: 250 A 25 kA for 0.1s, 10 kA for 1.0 s
- Chassis main bars direct connect to 160 A or 250 A main switch saving space
- Tee-offs 12 to 96 pole
- Tee-offs 50% with caps
- IP20 touch protection for chassis 160 A and 250 A main switches
- IP20 touch protection for 250 A MCCB to chassis connection kits
- Chassis are optional universal or top fed only main bar connection
- Captive padlock option
- Interchangeable with CD chassis allows older boards to be upgraded

SPECIFICATIONS

Product Series	GB
Chassis Type	Main Chassis
Details, compatible Product Series	Suits DIN-T MCBs and RCDs
In, Rated Current	250 A
Tee-Off Direction	Left / Right
Split Chassis	No
Tee-Off Isolator	Yes
Capped Tee-Offs	50 %
Split-In Field	No
Ue, Rated Operational Voltage, AC, max	415 V AC
Icw, Short Time Withstand Current, 200ms (rms)	25 kA, 200ms
Icw, Short Time Withstand Current, 300ms (rms)	20 kA, 300ms
Icw, short time withstand current, 1s (rms)	10 kA for 1s
Number of Poles	12
Number of Poles, Bottom	3 Bottom
Number of Poles, 18mm Pitch	12 18mm Pitch
Output Phases	3P
Material, Body / Housing	Encapsulated material
IP Rating	IP20
Height, Cutout	110 mm
Height, Pan	140 mm
Width, Pan	250 mm
Depth	82 mm
Standards Compliance	AS/NZS 3000:2007 AS/NZS 61439.1

