


# UT3 Unitray

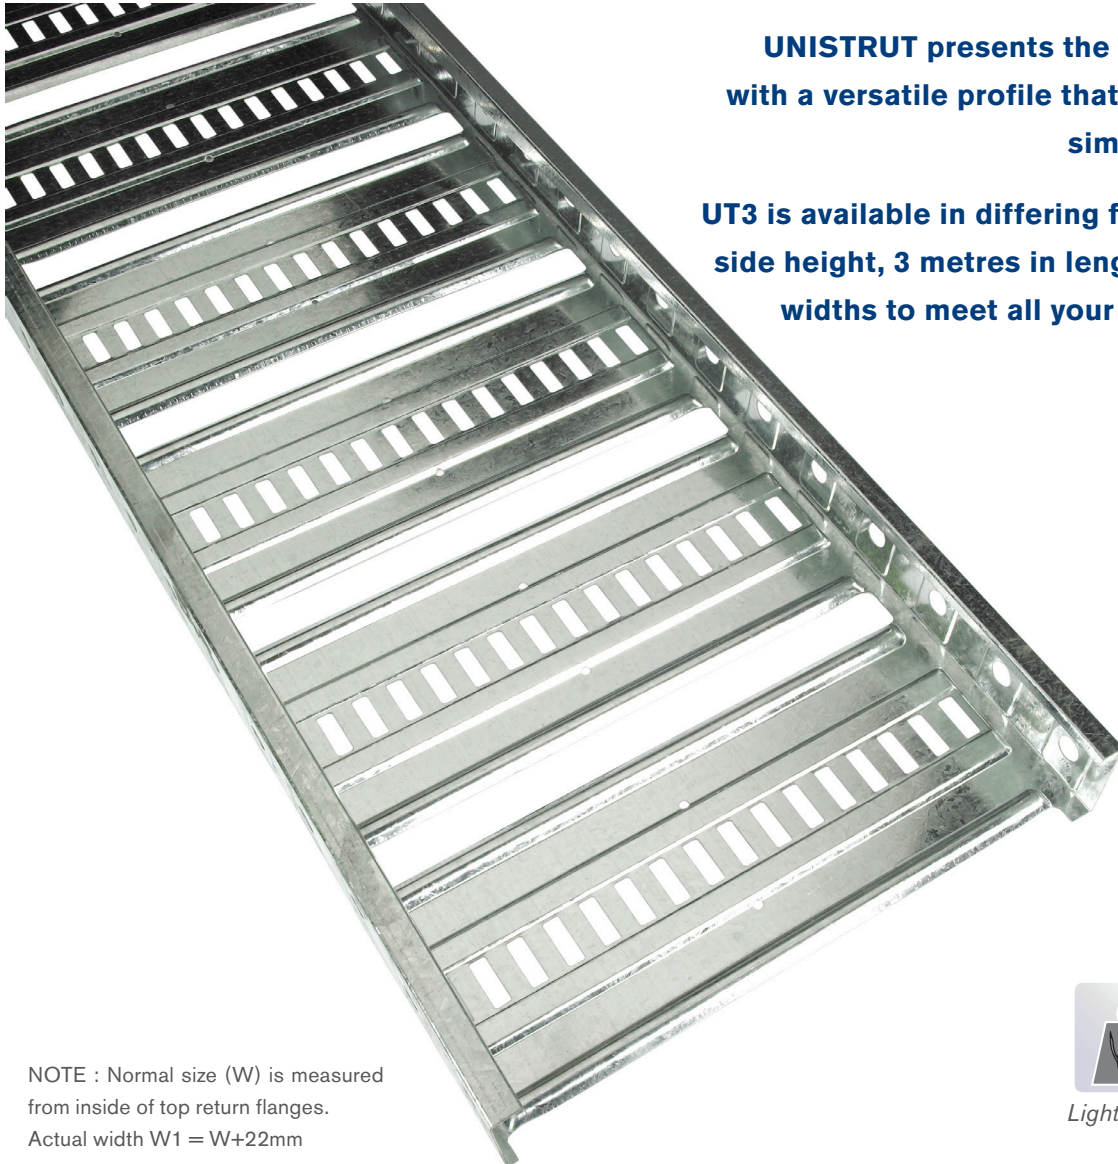

**UNISTRUT presents the new Unitray range, with a versatile profile that adds strength and simplifies installation.**

**UT3 is available in differing finishes with 50mm side height, 3 metres in length and a variety of widths to meet all your application needs.**

NOTE : Normal size (W) is measured from inside of top return flanges.  
Actual width W1 = W+22mm



Light Weight



Sold as individual

Nominal Size (W)	Actual Size (W1)	Length	Part No.			
			GB	HDG	AL *	SS *
mm	mm	mm				
150	172	3000	UT3-150G	UT3-150H	UT3-150AL	UT3-150SS
300	322	3000	UT3-300G	UT3-300H	UT3-300AL	UT3-300SS
450	472	3000	UT3-450G	UT3-450H	UT3-450AL	UT3-450SS
600	622	3000	UT3-600G	UT3-600H	UT3-600AL	UT3-600SS

NOTE : \* Special order only - non-returnable

Basic load 125kgs/linear meter on 1.5m span

## UT3 CABLETRAY

Deflections mm

	10mm	20mm	25mm	35mm
Span 1.5 meters				
Span 2.0 meters				
Span 2.4 meters				
Span 3.0 meters				

Allowable Load                      125kg/m      75kg/m      50kg/m      35kg/m

NOTE : The deflections have been provided as a guide based on CONTINUOUS spans.