

PRODUCT DATASHEET HE SL 14 W/830

SMARTLUX T5 HE | Tubular fluorescent lamps 16 mm, high efficiency





TECHNICAL DATA


Electrical data

Nominal voltage	220 V	
Nominal wattage	14.00 W	
Rated lamp efficacy (HF data 25 °C)	86 lm/W	
Rated wattage	14.00 W	

Photometrical data

Color rendering index Ra	≥80
Rated luminous flux	1200 lm
Luminous flux at 25 °C	1200 lm
Luminous flux at 35 °C	1350 lm
Light color	3000
Rated color temperature	3000 K
Nominal luminous flux	1200 lm
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.92
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.90
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89
Color temperature	3000 K
Luminous flux	1200 lm
Color rendering index Ra	≥80

Dimensions & weight

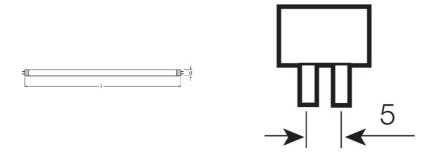

Tube diameter	16 mm
Length	549.0 mm

Length with base excl. base pins/connection	549.00 mm	
Diameter	16.0 mm	
Maximum diameter	16.0 mm	

Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	35.0 °C

Lifespan

Lifespan	20000 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.90
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	20000 h
Nominal lamp life time	20000 h

Additional product data

Base (standard designation)	G5	
Mercury content	1.2 mg	
Show WEEE picto	Yes	

Capabilities


Suitable for indoor Yes	Suitable for indoor	163
-------------------------	---------------------	-----

Certificates & standards


Energy efficiency class	A+
Energy efficiency class	A+
Energy consumption	16 kWh/1000h

June 12, 2018, 14:05:29 **HE SL 14 W/830**

Light Distribution



Spectral power distribution





Circuit diagram

Circuit diagram

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321335180	HE SL 14 W/830	Shipping carton box 20	591 mm x 104 mm x 88 mm	5.41 dm ³	1528.00 g
4008321338389	HE SL 14 W/830	Shipping carton box 50	600 mm x 204 mm x 123 mm	15.06 dm³	3742.00 g
4008321385383	HE SL 14 W/830	Shipping carton box 50	600 mm x 204 mm x 123 mm	15.06 dm³	3742.00 g

4052899178502	HE SL 14 W/830	Shipping carton box 40	594 mm x 194 mm x 87 mm	10.03 dm³	2668.00 g
4052899196384	HE SL 14 W/830	Shipping carton box 20	591 mm x 104 mm x 88 mm	5.41 dm³	1528.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.