



LEEMAN S9318 - 1.5W


LED 1.5 watt recessed square profile wall luminaire

Application

Residential stairs, walkways and interior commercial features

Design Specifications

- Durable aluminium body profile, cut-out 68 x 68mm
- Matt white powder coat finish or anodised silver
- High efficiency SMD optics, CCT 3000K, beam distribution 86°
- Frosted glass diffuser
- 12V AC or DC driver required, suitable drivers - PLUTO EGL12V/6W PLUTO 15DV, 40DV, 60DV
- Optional pre-install wall box available

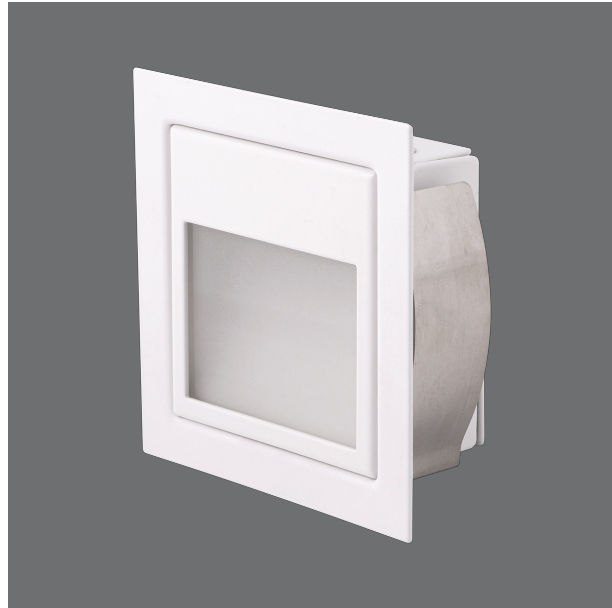

NEED A HAND
PACKING YOUR
PRODUCT DATA
SHEETS?
GIVE THE SAL
SHOPPING CART
A GO.

Performance

- Dimmable - **NO**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Input Voltage (V/DC)	Power (W)	Lumens (lm)	CCT (K)
	S9318 AS	12	12	1.5	70	3000
	S9318 MW	12	12	1.5	70	3000


CRI	Beam Angle (°)	Dimmable	Dim (mm)	Body Colour
80	86	NO	80(L) x 80(W) x 30(H)	Anodised Silver
80	86	NO	80(L) x 80(W) x 30(H)	White

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

cut-out 68 x 68mm

S9318

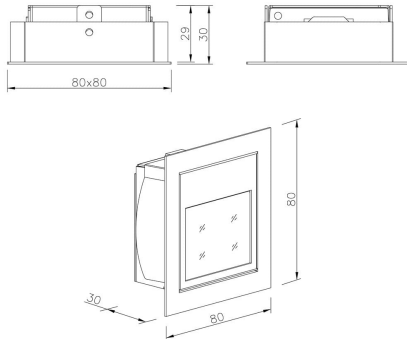

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9318 at 3000K

