


LIFELIGHT



LED Recessed Emergency Light

The Lifelight provides a D40 emergency classification in a sleek architectural design. With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

As the first LED emergency light on the market, the Lifelight continues to lead the way in a variety of emergency lighting applications.

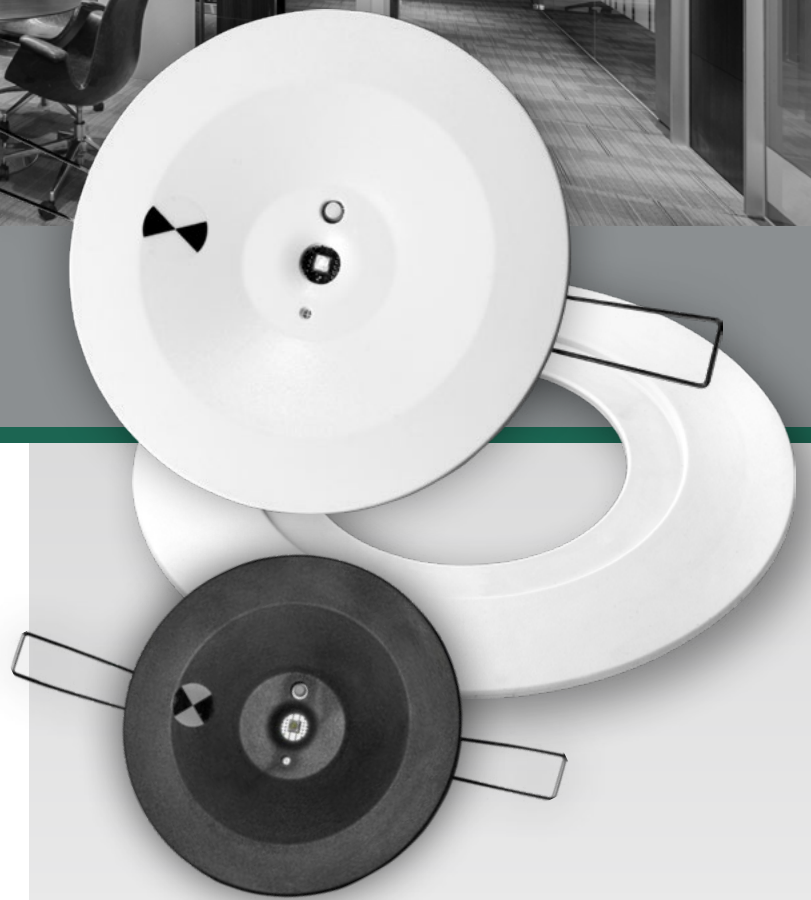

Applications

- | | |
|---|--|
|  Office Buildings |  Apartments |
|  Schools |  Retail outlets |

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- 145mm adaptor plate for retrofitting
- Low Power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate[®] battery
- Clevertest Plus System compatible
- White or Black as standard with other colours available on request



LIFELIGHT

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard - White	ELIFE-X-LI	CLIFE	LLIFE
	Standard - Black	-	CLIFE-BLK	LLIFE-BLK
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CLIFE-DALI	LLIFE-DALI
	Zoneworks® XT Hive	-	CLIFE-HV	LLIFE-HV
Carton Quantity		10 pieces		
Weight - single (carton)		0.5kg (8.2kg)	0.8kg (9.7kg)	
Dimensions (L x W x H) - Control Pack		232mm x 51mm x 42mm		
Dimensions - Head Diameter		95mm		
Dimensions - Adaptor plate		145mm		
Ceiling hole cut-out		85mm		
Minimum Ceiling Depth		120mm		

POWER, LAMPS AND BATTERY		EL	LP	L10
Power Consumption (Standby / Max)		0.4W / 1.3W	1.0W / 3.9W	1.3W / 3.0W
Lamp(s)		1 x LED		
Battery		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		


TECHNICAL SPECIFICATIONS		SPARE PARTS			
		EL	LP	L10	
Operating Mode	Non-Maintained	Battery	1560150	1550010	1530010
Voltage (V) Frequency (Hz)	220-240V (50Hz)	DALI Node	N/A	8003060	8003060
Operating Temperature	1°C to 40°C	Zoneworks® XT Hive Node	N/A	8003190	8003190
IP Rating (IP)	IP20				

CLASSIFICATION	EL	LP	L10
Co	D40	D40	D40
C90	D40	D40	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23	23.1	23

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

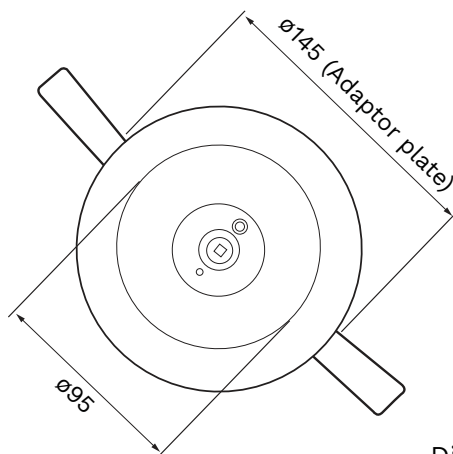

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
 All features and specifications are subject to change without prior notice.
 CT-BRO-ANZ-LIFELIGHT-REC-EM-001

