SIEMENS

Data sheet 3RT2015-1AB01



power contactor, AC-3e/AC-3, 7 A, 3 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, auxiliary contacts: 1 NO, screw terminal, size: S00

product brand name	SIRIUS	
product designation	Power contactor	
product type designation	3RT2	
General technical data		
size of contactor	S00	
product extension		
 function module for communication 	No	
auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	0.6 W	
 at AC in hot operating state per pole 	0.2 W	
without load current share typical	1.1 W	
type of calculation of power loss depending on pole	quadratic	
insulation voltage		
 of main circuit with degree of pollution 3 rated value 	690 V	
 of auxiliary circuit with degree of pollution 3 rated value 	690 V	
surge voltage resistance		
of main circuit rated value	6 kV	
of auxiliary circuit rated value	6 kV	
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V	
shock resistance at rectangular impulse		
• at AC	6,7g / 5 ms, 4,2g / 10 ms	
shock resistance with sine pulse		
• at AC	10,5g / 5 ms, 6,6g / 10 ms	
mechanical service life (operating cycles)		
 of contactor typical 	30 000 000	
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000	
 of the contactor with added auxiliary switch block typical 	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Weight	0.243 kg	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-25 +60 °C	
during storage	-55 +80 °C	
relative humidity minimum	10 %	
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %	

Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	39.6 kg
global warming potential [CO2 eq] during manufacturing	1.18 kg
global warming potential [CO2 eq] during operation	38.5 kg
global warming potential [CO2 eq] after end of life	-0.155 kg
Main circuit	0.100 Mg
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	·
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value at AC-1 	18 A
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	18 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	16 A
• at AC-3	
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value• at AC-3e	4.9 A
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-4 at 400 V rated value	6.5 A
• at AC-5a up to 690 V rated value	15.8 A
• at AC-5b up to 400 V rated value	5.8 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	4 A
 up to 400 V for current peak value n=20 rated value 	4 A
 up to 500 V for current peak value n=20 rated value 	3.8 A
— up to 690 V for current peak value n=20 rated value• at AC-6a	3.6 A
— up to 230 V for current peak value n=30 rated value	2.7 A
— up to 400 V for current peak value n=30 rated value	2.7 A
— up to 500 V for current peak value n=30 rated value	2.5 A
— up to 690 V for current peak value n=30 rated value	2.4 A
minimum cross-section in main circuit at maximum AC-1 rated value	2.5 mm ²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	2.6 A
at 690 V rated value	1.8 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 60 V rated value	15 A
— at 110 V rated value	1.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.42 A
with 2 current paths in series at DC-1	45.4
— at 24 V rated value	15 A
— at 60 V rated value	15 A
— at 110 V rated value	8.4 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.5 A

15 A
15 A
15 A
15 A
0.9 A
0.7 A
15 A
0.35 A
0.1 A
15 A
3.5 A
0.25 A
15 A
15 A
15 A
1.2 A
0.14 A
0.14 A
1.5 kW
3 kW
3 kW
4 kW
1.5 kW
3 kW
3 kW
4 kW
1.15 kW
1.15 kW
1.5 kVA
2.7 kVA
3.3 kVA
4.3 kVA
1 kVA
1.8 kVA
2.2 kVA
2.2 kVA 2.9 kVA
2.9 kVA
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value 43 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value 43 A; Use minimum cross-section acc. to AC-1 rated value
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value 43 A; Use minimum cross-section acc. to AC-1 rated value 10 000 1/h
2.9 kVA 120 A; Use minimum cross-section acc. to AC-1 rated value 86 A; Use minimum cross-section acc. to AC-1 rated value 67 A; Use minimum cross-section acc. to AC-1 rated value 52 A; Use minimum cross-section acc. to AC-1 rated value 43 A; Use minimum cross-section acc. to AC-1 rated value 10 000 1/h

• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	27 VA
• at 60 Hz	24.3 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
• at 60 Hz	0.75
apparent holding power of magnet coil at AC	4.2.1/4
• at 50 Hz	4.2 VA
• at 60 Hz	3.3 VA
inductive power factor with the holding power of the coil • at 50 Hz	0.25
• at 50 Hz	0.25
• at 60 HZ closing delay	0.20
• at AC	9 35 ms
opening delay	V VV 1110
• at AC	4 15 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NO contacts for auxiliary contacts instantaneous	1
contact	
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
at 690 V rated value	1 A
operational current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
at 125 V rated value at 230 V rated value	2 A
at 220 V rated value	1.4
at 600 V rated value	0.15 A
operational current at DC-13	10 A
at 24 V rated value at 48 V rated value	10 A
at 48 V rated valueat 60 V rated value	2 A 2 A
at 50 V rated value at 110 V rated value	1.4
at 110 V rated value at 125 V rated value	0.9 A
at 125 V rated value at 220 V rated value	0.9 A 0.3 A
at 600 V rated value	0.3 A 0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	ridary stritoring per 100 million (17-4, 1 mile)
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	4.8 A
at 600 V rated value at 600 V rated value	6.1 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	0.25 hp
at 1.5.125 Y lated Yalde	

— at 230 V rated value	0.75 hp
• for 3-phase AC motor	
— at 200/208 V rated value	1.5 hp
— at 220/230 V rated value	2 hp
— at 460/480 V rated value	3 hp
— at 575/600 V rated value	5 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
design of the fuse link	
 for short-circuit protection of the main circuit 	
 — with type of coordination 1 required 	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)
 — with type of assignment 2 required 	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)
 for short-circuit protection of the auxiliary switch required 	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	58 mm
width	45 mm
depth	73 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
	Offilli
• for grounded parts	40
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	screw-type terminals
 at contactor for auxiliary contacts 	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for main contacts	2x (20 16), 2x (18 14), 2x 12
connectable conductor cross-section for main contacts	, ,, ,,
finely stranded with core end processing	0.5 2.5 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 4 mm²
	0.5 4 mm²
finely stranded with core end processing type of connectable conductor cross-sections	0.0 2.0 IIIII
type of connectable conductor cross-sections	
for auxiliary contacts colid or stranded.	2v (0.5
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross	

section	
• for main contacts	20 12
 for auxiliary contacts 	20 12
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes; with 3RH29
 positively driven operation according to IEC 60947-5-1 	No
 suitable for safety function 	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	
General Product Approval	









<u>KC</u>



EMV Test Certificates Marine / Shipping



Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping other







Miscellaneous

Confirmation

Confirmation

Railway Environment

Special Test Certificate



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1AB01

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2015-1AB01

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RT2015-1AB01&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1AB01/char


Further characteristics (e.g. electrical endurance, switching frequency)


earch&mlfb=3RT2015-1AB01&objecttype=14&gridview=view1







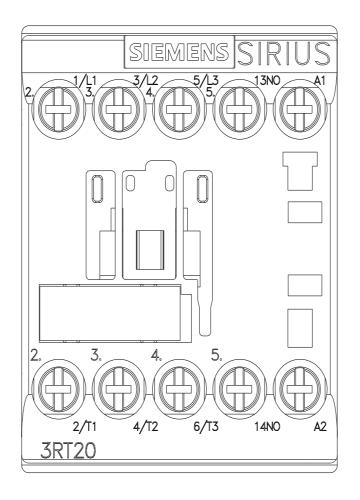

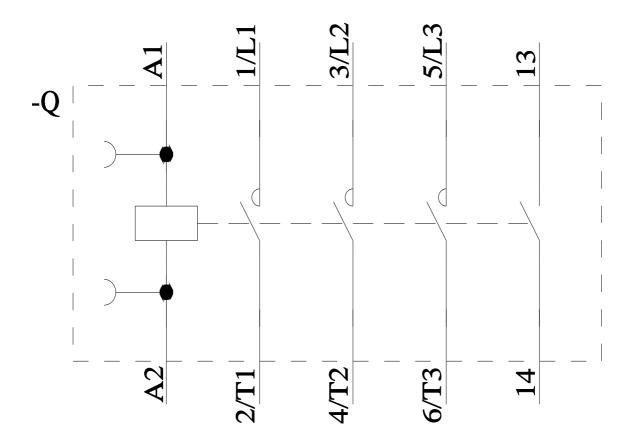

last modified:

1/24/2025