



# STELLAR

STELLAR145A4K

SAP CODE: 2000436

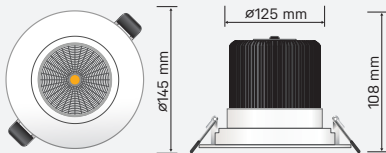

Photometric Diagram



Unit: cd  
 - C0/180 50.0deg  
 - C90/270 50.0deg

## KEY INFORMATION

Lumen Output	1970lm
Input Power	20W
Hole Cutout Size	Ø125mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP40
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

## PHOTOMETRIC

Efficacy	98lm/W
LED	COB
CCT	4000K
CRI	>80
Beam Angle	50°

## ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	37VDC
Power Factor	>0.9
LED Input Current (nominal)	500mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Multifaceted Reflector
Adjustable Angle	0-30°
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	1.0kg
Dimensions	Ø145x108mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2

20W, 145mm, deep faceted reflector, gimbal LED downlight

A powerful and dimmable white trimmed downlight with a clear lens and deep faceted reflector providing good glare control.

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.