


ELECTRA CABLES

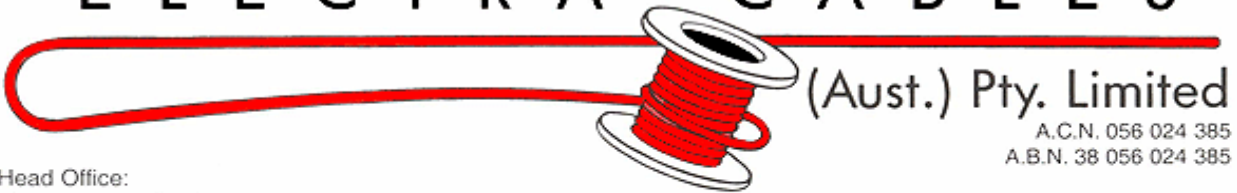

Head Office:
21-23 Pavese Street
Guildford, N.S.W. 2161
P.O. Box 2084
Smithfield, N.S.W. 2164
Phone: (02) 9632 2266
Fax: (02) 9632 8822

Victoria Branch:
22-24 Kilkenny Court
Dandenong South, Vic. 3175
Phone: (03) 9769 2811
Fax: (03) 9769 2425

Queensland Branch:
Unit 2-3, 52 Fulcrum Street
Richlands, Qld, 4077
Phone: (07) 3375 6277
Fax: (07) 3375 6299

Detonator Cable

Two bare copper conductor, twisted and striped shot fire cable.

Application: For the interconnection of detonators and related shot firing equipment.

Conductor: Bare copper

Insulation: PVC V75

Voltage: ELV

Standards: AS/NZS3808 (PVC)

Packing Length: 100m, 200m, 500m

CAUTION

Extra Low Voltage – Should
NOT be connected to mains
power supply

Typical Features:

Electra Cables Part No.	Nom. O/D mm	No. of Cores	Stranding No./mm	Insulation Thickness mm	Cable Colors	Spark Test a.c KV	Max. D.C Resistance @ 20°C Ω/Km
DET7202	2.2	2	7/0.20	0.25	White/White	1	79.1
DET10502	2.6	2	1/0.50	0.4	Red/White	1	87.8
DET10612	2.8	2	1/0.61	0.4	Red/Green	1	59.0
DET10712	3.0	2	1/0.71	0.4	Red/White Yellow/Yellow	1	43.5
DET10802	3.6	2	1/0.80	0.5	Blue/Green	2	34.3
DET24202	5.5	2	24/0.2	0.8	Red/White	3	23.1