


Catalogue No: **2711P-T10C22D9P**

PVP7 PERF 10in TFT COLOUR TOUCH DLR 24V DC

Automation Systems > Operator Panels and Industrial Computers > Operator Panels > PanelView™ Plus 7 Graphic Terminals > PanelView™ Plus 7 Performance Terminals



PanelView Plus 7 Performance, Touch, 10 inch, Dual Port Ethernet, 24V DC

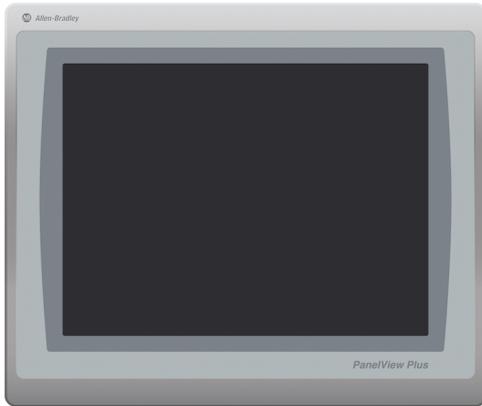

- Offers display sizes from 7 to 19" with wide screen and keypad options
- Includes video playback support which provides advanced user help capabilities
- Includes RDP client feature to create thin client terminals
- Features Ethernet ports that support DLR, linear, or star network topologies

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type Operator Panel	Integrated Operator Panel
Power Supply	18-30 V DC
Power Consumption (Max.)	50 W(DC) / VA(AC)
Operator Input Method(s)	Touch
Display Size	10.4 inches
Display Technology	TFT (Thin Film Transistor)
Display Resolution	800x600 pixels
Display Colours	262 k
Display Brightness	300 cd/m2
Display Backlight	LED
Display Backlight Life	50000 hours
Touch Screen Type	Resistive
Real Time Clock	Integrated
Battery Type	Lithium
Service Life, Battery	4 years
RAM, Installed	1 GB
Non-Volatile Memory	512 MB
Memory Card Slots	1 x SD/MMC
Peripheral I/O Interface(s)	2 x USB Host
Ethernet Interfaces	2 x 10/100Mbps
Communications Ports (On Board)	1xUSB Device Port 2 x Ethernet RJ-45
Communications Protocols	EtherNet/IP EtherNet/OCPP
Operating Force, Touch Screen	0.98 N
Height, Cutout	224 mm
Width, Cutout	269 mm
Weight	2.28 kg
Depth	69.6 mm

Catalogue No: **2711P-T10C22D9P**

PVP7 PERF 10in TFT COLOUR TOUCH DLR 24V DC

Automation Systems > Operator Panels and Industrial Computers > Operator Panels > PanelView™ Plus 7 Graphic Terminals > PanelView™ Plus 7 Performance Terminals



Width	297 mm
Height	252 mm
IP Rating, Front	IP66
Marine Certified	No
Conformal Coating (CC)	No Y / N
Supported Operating System	Windows CE 6.0 Operating System with Extended Features/File Viewers
Software, Configuration	FactoryTalk View Studio Machine Edition
Operating Temperature, Max	55 °C max
Operating Temperature, Min	0 °C min
Storage Temperature, Max	70 °C max
Storage Temperature, Min	-25 °C min
Altitude, Operating, Max	2000 m
Relative humidity, min	5 %RH
Relative Humidity, Max	95 %RH
Humidity Type	Non-condensing
Shock Acceleration (Max.)	15 g
Shock Duration (Max.)	11 ms
Vibration Acceleration (Max.)	2 m/s ²
Vibration Displacement (Peak to Peak Max.)	0.3048 mm
Vibration Frequency, Operational (Max.)	500 Hz
Standards Compliance	AS/NZS CISPR 11 CSA C22.2 No.213 EC Low voltage directive 2006/95/EC (up to 1500V DC) EC EMC Directive 2004/108/EC EN 61000-6-4 EN 61000-6-2 EN 61131-2 IEC 60529 ISA 12.12.01 Class 1 Div 2 NEMA 4X UL 13 UL 50
Certifications	CE CSA RCM RoHS C-UL-US UL ODVA - EtherNet/IP KC (KCC)

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-