


EARTHING CLAMPS

VARIOUS EARTHING CLAMPS

EARTHING CLAMPS



REX16-120

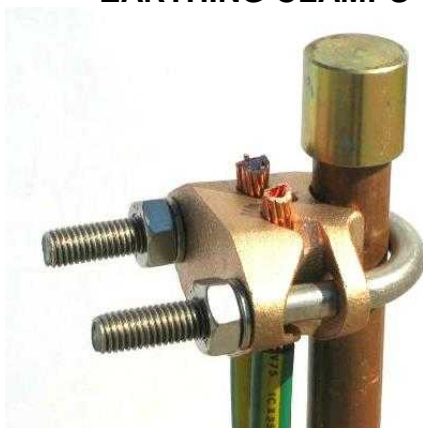


REP16-120/2




REP16-120



SCTO25

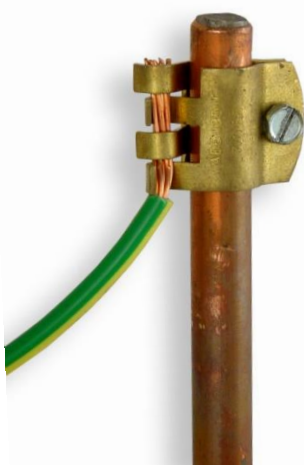

12D-1

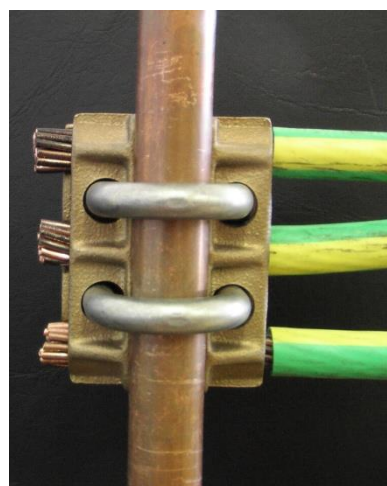

RET25-120/3

Catalogue No.	Description	Weight (kg)
REC35-120	REC35-120 Clamp to suit 13, 14 and 15mm diameter Earth Rod (35-120mm ² Cable) Clamp can be inverted to accommodate 16mm ² Cable.	0.15
REP16	REP16-120 Clamp suits 19mm diameter Earth Rod. (16-120mm ² Cable)	0.22
REP16-120/2	REP16-120/2 Clamp suits 19mm diameter Earth Rod (16 -120mm ² Cable) Two Cables in Parallel	0.4
RET	RET25-120/3 Clamp suits 15mm and 19mm Diameter Earth Rods Three Cables in Parallel (25-120mm ² Cable)	0.7
REW48-16/120	REW4816-120 Clamp suits 48mm OD 40mm NB Pipe (16-120mm ² Cable)	0.5
REW48-16/185-2	REW4816-185-2 Clamp suits 48mm OD 40mm NB Pipe (16-185mm ² Cable)	0.53
REX	REX16-120 Clamp suits 13mm, 14mm, 15mm & 19mm diameter Earth (16-120mm ² Cable)	0.26
SCTO25	SCTO25 Clamp 35-150mm ² Conductor to 6mm Flat Surface, Single Bolt - Two Cables	0.4
12D1	12D-1 Brass Clip suits 13mm diameter Earth Rod	0.02

All Castings made from High Copper Content Alloy. U-bolts, Nuts and Spring Washers are manufactured from G304 Stainless Steel. The 12D-1 Brass Clip complies with AS3000:2007 and ASS1882:2002 and carries Certificate of Suitability No: CS4677N.