



45RU 800MM WIDE & 1200MM DEEP FULLY ASSEMBLED FREE STANDING SERVER CABINET

PART NUMBER: CBN-45RU-812FS

BAR CODE: 9350784001191

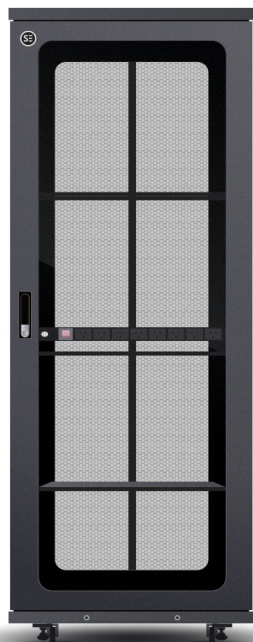

Rear Split Mesh
Door + Door Lock



Multiple cable entry glands at the top



Ample cable entry glands at the
bottom




Nylon bush lining in all cable entry
glands to protect from wear and tear




Earth straps on front and rear doors



Pre-installed lockable castors and
stabilising feet



Included roof fan kit

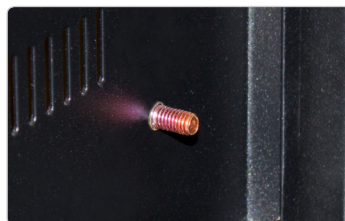

Earth bolt on side panel



Removable side panel

PRODUCT DESCRIPTION

Serveredge CBN-45RU-812FS fully assembled server racks are a perfect solution for securely storing your standard 19inch rack mount equipment. This free-standing rack has been especially designed for use with Servers, Switches, AV Equipment, Security Systems, Telephone Systems, Patch Panels and other Networking Equipment. This Serveredge rack is packed with features designed to simplify rack equipment installations and maintenance. The server rack comes with a 25-year manufacturer's warranty*.

GUARANTEE/WARRANTY

Serveredge products are manufactured at the highest standards using highest quality materials at an affordable price. This Serveredge product comes with 25 Years Warranty. Subject to Serveredge Terms and Conditions*

PRODUCT INCLUDES

8 Way Horizontal PDU: (8) 3 Pin AUS GPO Output; (1) 3 Pin Aus Plug Input , 10A, 240V	× 1
4 Way Roof Mount Fan	× 1
Fixed Shelves (855mm Deep)	× 3
Vertical Cable managers per rack	× 2
Lockable Castors	× 4
Stabilizing Feet	× 4
Adjustable 19inch Mounting Rails	× 4
Keys	× 2
Heavy Duty M6 Cage Nuts, Washer & Screw	× 40
Split Perforated Mesh Door	× 1
Front Tempered Glass Door	× 1
Split Lockable Side Panels	× 2
Grounding Lugs - Front Door, Rear Door, Side Panels	
Earth Straps - Front Door & Rear Door	

PRODUCT FEATURES

- Designed for IT, Audio Visual, Security and Data equipment
- Ships fully assembled for quick installation
- 1000Kg of stationary load capacity
- Pre-installed lockable castors
- Levelling feet extend to allow enclosure to be positioned on uneven floors and are removable when not required
- Convenient grounding system with grounding lugs on doors and side panels
- Earth straps on front and rear doors
- Built in latching tabs allow enclosures to be combined securely in rows (*Latching kit needs to be purchased separately)
- Includes (3) fixed shelves with 855mm depth
- Locking front glass door and rear split perforated mesh door
- Locking and removable side panels for easy access
- Nylon Bush lined cable entry glands at top and bottom to protect cables from wear and tear
- Conforms to Standard ANSI/EIA RS-31 -D, IEC297-2, DIN4191; PART1, DIN 4194;PAT7, GB/T3 47M 2-92*
- 25-year warranty* See T&Cs

PRODUCT SPECIFICATION

Rack Height	45RU
Shipping Dimensions (WDH/mm)	860 × 1260 × 2200
Shipping weight (kg)	178
Unit Dimensions (WDH/mm)	800 × 1200 × 2188
Unit weight (kg)	171
Colour	Black
Weight Capacity - Stationary (kg)	1000
Grounding lug	Front and Back Door Frames
Fixed Shelves depth (mm)	855
Preset Mounting Distance (front to rear mounting rails) (mm)	860
Maximum Mounting Distance (front to rear mounting rails) (mm)	1150
Minimum Mounting Distance (front to rear mounting rails) (mm)	145