



ENCLOSURES

LOAD CENTRES, SURFACE MODULES
& ACCESSORIES



Data Specification **2020**



AUSTRALIA WIDE DELIVERY
Expedited delivery to all states in Australia



SAME DAY DISPATCH
Orders prior to 12PM will be dispatched the same day



5 YEAR WARRANTY
You can get a trusted 5 Year In House Warranty with CSG

[DESCRIPTION]

LOAD CENTRES

Connected Switchgears' premium load centres are manufactured from UV stable material which means they won't fade or yellow with age. All load centres are flame proof up to 660 degrees celsius and are supplied with a variety of neutral and earth link rated at 110amps. Switchgear mounts are 35mm din rail and sold complete with pole fillers, labels and optional busbars. Available in 4 to 36 pole, surface and flush mount. Metal bases are available to ensure compliance with SIR and AS/NZS 3000:2018 wiring rules in various installations.

[FEATURES]

- Flame Resistant Material
- Translucent Hinged Door
- UV Stable
- Compliant with SIR
- Includes: Labels, Pole Fillers and Links
- Options: White Door, Metal Base, Busbars


[TECHNICAL PARAMETERS]

- IP Protection: IP40
- 110amp Links
- Optional 63amp Busbar
- Material: UV Stable ABS, 660° Flame Retardant (DBSMC12 are 720° Fire Retardant)


[COMPLIANCE]

- AS/NZS 3439.3
- AS/NZS 3000:2018

[IMAGES]

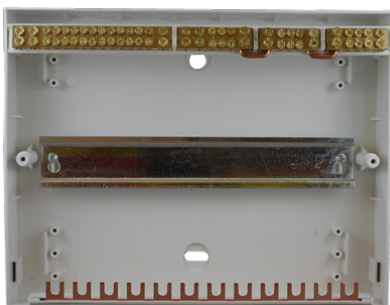

DBSMC12

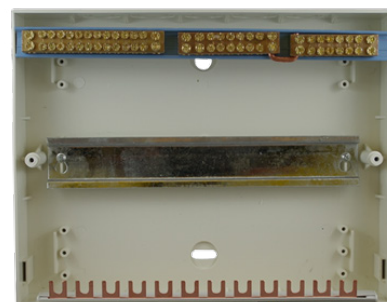

DBSMC12T
(Trade Version)

[SPECIFICATIONS]

SURFACE MOUNT LOAD CENTRES						
Product Code	Poles	Links		Overall Size (mm)		
		Bars	Terminals	H	W	D
DBSMC4	4	2	1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (1 x 7mmØ, 4 x 5mmØ)	200	110	85
DBSMC6	6	3	1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (3 x 7mmØ, 3 x 5mmØ) 1 x (1 x 7mmØ, 3 x 5mmØ)	200	148	85
DBSMC8	8	3	1 x (2 x 7mmØ, 8 x 5mmØ) 1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (2 x 7mmØ, 4 x 5mmØ)	200	182	85
DBSMC12	12	4	1 x (3 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 3 x 5mmØ) 1 x (2 x 7mmØ, 3 x 5mmØ) 1 x (2 x 7mmØ, 3 x 5mmØ)	200	255	85
DBSMC12T (TRADE)	12	3	1 x (2 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ)	200	255	85
DBSMC18	18	5	1 x (1 x 7mmØ, 11 x 5mmØ) 1 x (4 x 7mmØ, 5 x 5mmØ) 1 x (2 x 7mmØ, 2 x 5mmØ) 1 x (2 x 7mmØ, 2 x 5mmØ) 1 x (1 x 7mmØ, 3 x 5mmØ)	220	360	85
DBSMC24	24	5	1 x (2 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ)	325	270	85
DBSMC36	36	5	1 x (2 x 7mmØ, 18 x 5mmØ) 1 x (2 x 7mmØ, 18 x 5mmØ) 1 x (2 x 7mmØ, 15 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 12 x 5mmØ)	475	305	85

[SPECIFICATIONS]

FLUSH MOUNT LOAD CENTRES									
Product Code	Poles	Links		Overall Size (mm)			Cut Out Size (mm)		
		Bars	Terminals	H	W	D	H	W	D
DBFMC4	4	2	1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (1 x 7mmØ, 4 x 5mmØ)	222	135	-	202	118	60
DBFMC6	6	3	1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (3 x 7mmØ, 3 x 5mmØ) 1 x (1 x 7mmØ, 3 x 5mmØ)	245	198	-	200	150	60
DBFMC8	8	3	1 x (2 x 7mmØ, 8 x 5mmØ) 1 x (2 x 7mmØ, 4 x 5mmØ) 1 x (2 x 7mmØ, 4 x 5mmØ)	220	215	-	215	190	60
DBFMC12	12	4	1 x (3 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 3 x 5mmØ) 1 x (2 x 7mmØ, 3 x 5mmØ) 1 x (2 x 7mmØ, 3 x 5mmØ)	270	335	-	215	263	68
DBFMC18	18	5	1 x (1 x 7mmØ, 11 x 5mmØ) 1 x (4 x 7mmØ, 5 x 5mmØ) 1 x (2 x 7mmØ, 2 x 5mmØ) 1 x (2 x 7mmØ, 2 x 5mmØ) 1 x (1 x 7mmØ, 3 x 5mmØ)	302	454	-	240	370	68
DBFMC24	24	6	1 x (2 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 12 x 5mmØ) 1 x (3 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ)	345	305	-	315	263	68
DBFMC36	36	5	1 x (2 x 7mmØ, 18 x 5mmØ) 1 x (2 x 7mmØ, 18 x 5mmØ) 1 x (2 x 7mmØ, 15 x 5mmØ) 1 x (2 x 7mmØ, 6 x 5mmØ) 1 x (2 x 7mmØ, 12 x 5mmØ)	505	341	-	460	300	68

ACCESSORIES		
Product Code	Description	Poles
DBFMC8-B	Metal Base	8
DBFMC12-B	Metal Base	12
DBFMC18-B	Metal Base	18

[DESCRIPTION]

SURFACE MODULES

Connected Switchgears' surface modules are manufactured from UV stable ABS material, meaning they won't fade or yellow with age. All surface modules are made from flame retardant material and are supplied with 35mm din rail switchgear mounts for mounting circuit protection devices. Available in 1 to 18 pole.

[FEATURES]

- Flame Retardant Material
- UV Protection
- Mounting Brackets
- Compliant with SIR

[TECHNICAL PARAMETERS]

- Material: UV Stable ABS, 660° Fire Resistance

[COMPLIANCE]

- AS/NZS 3439.3

[IMAGES]



DBSM4



DBSM6



DBSM12



DBSM18

[SPECIFICATIONS]

SURFACE MOUNT MODULES						
Product Code	Description	Poles	Overall Size (mm)			
			H	W	D	
DBSM1	1 Pole Surface Mount Module	1	130	33	62	
DBSM2	2 Pole Surface Mount Module	2	130	20	62	
DBSM4	4 Pole Surface Mount Module	4	130	85	62	
DBSM6	6 Pole Surface Mount Module	6	130	122	62	
DBSM8	8 Pole Surface Mount Module	8	158	157	67	
DBSM12	12 Pole Surface Mount Module	12	260	163	63	
DBSM18	18 Pole Surface Mount Module	18	367	163	63	

ACCESSORIES			
Product Code	Description		Pole Fillers
DBBBF	12 Pole Busbar		-
DBPF	Pack of Pole Fillers and Labels		2 Full & 8 Half Size

[WARRANTY]

Connected Switchgear Enclosures come with a trusted 5 Year In House Warranty. That means that you have peace of mind knowing that if a fault develops within a five year period, Connected Group Australia will cover the cost of replacing the product and it's installation.*

* See our website for full terms and conditions www.connectedswitchgear.com.au