



SURFACE MOUNT LEDFIRE III

A NEW ERA OF EMERGENCY MONITORING AND TESTING



EV-LEDFIRE-III-SM-B
CODE: 01690

EV-LEDFIRE-III-SM
CODE: 01689

FEATURES

- Premium Lithium batteries (LiFePO4) and smart charger
- Fully compliant (AS/NZS 2293)
- Emergency classification D63 (2hr)



WIRELESS UPGRADE:

Automatically test and sync data to the Cloud.



DALI CERTIFIED:

Connect to a DALI system for DALI testing.



SELF TEST:

Commission the product to perform its own tests.



SINGLE POINT UNIT:

Out of the box Gen III works as a SPU.

ORDERING INFORMATION

CODE	DESCRIPTION	PRODUCT NUMBER	LED WATTAGE	CARTON QTY.	WEIGHT (NET/ GROSS)
01689	Ledfire III Surface Mount	9336462016893	4.3 W	4	0.92kg / 4Kg
01690	Ledfire III Surface Mount (Black)	9336462016909	4.3 W	4	0.92kg / 4Kg

OPERATIONAL INFORMATION

GENERAL				BATTERY	
Voltage (V)	230-240	Mounting Type	Surface mounted	Battery Type	LiFePO4
Frequency (Hz)	50	IP Rating	IP20	Battery Code	1303
Max. Ambient Temp.	40°C	Duration	1/ 2/ 3/ 4/ 8 Hours (dependant on jumpers)	Charging Time	16 Hours
Class	2			Charger Operation	Multi state
Wiring	Hard Wired				

EMERGENCY PERFORMANCE

HOUR	1	2	3	4	8	CB
Lamp power (W)	4.3	4.3	3.4	2.8	1.4	2.8
Australian Classification	D63	D63	D32	D25	D8	D25


POWER

POWER DRAW	MAINTAINED MODE	NON-MAINTAINED MODE
Max. power draw	7 W	3 W
Avg. power draw	4.5 W	<0.25 W

CONSTRUCTION AND DIMENSIONS

BODY	PC
DIFFUSER	PC

LEDFIRE III SURFACE MOUNT

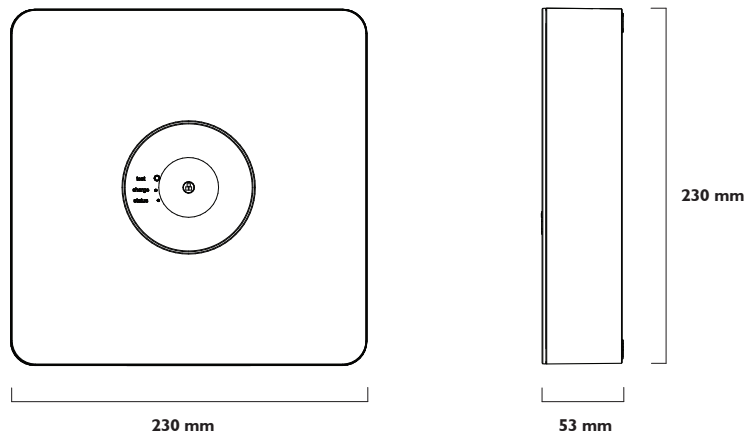

NOTE: For more information on the chemical resistance of our polycarbonate, please see the technical downloads page on the Evolt-Ektor website.

ACCESSORIES AND SPARE PARTS

CODE	DESCRIPTION	CODE	DESCRIPTION
01303	Battery 3000mAh 6.4V, 2 Cell LiFePO4	06118	Wireless daughterboard
05305	Easy commissioning module - Ektor	01990	Rod mount kit white
05304	Easy commissioning module - DALI	02004	Rod mount kit black

Datasheet is subject to change without notice

Last updated: **19.September 2016**



Please view our website for **full datasheet**