


# PRODUCT DATASHEET

## SPC.T FR 15 W 230 V E14

**SPECIAL T/FRIDGE | Incandescent lamps, tubular shape, for fridge lighting**

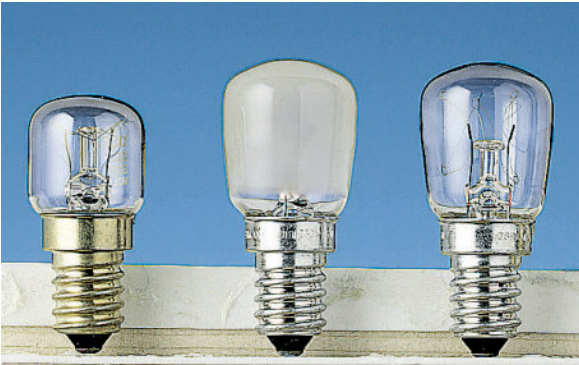

---

### AREAS OF APPLICATION

- Domestic refrigerators
- Sewing machines



**TECHNICAL DATA**

Electrical data

Nominal wattage	15.00 W
Nominal voltage	230 V
Rated wattage	15.00 W
Power factor $\lambda$	1.00



Photometrical data

Luminous flux	90 lm
Nominal luminous flux	90 lm
Rated luminous flux	90 lm
Rated color temperature	2700 K
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	>99
Color rendering index Ra	>99

Light technical data

Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



E14  
IEC 7004-23



E 14

Diameter	26.0 mm
Length	55.0 mm
Overall length	57.0 mm
Outer bulb	T26
Light center length (LCL)	45.0 mm
Length with base excl. base pins/connection	57.00 mm

## Lifespan

Nominal lamp life time	1000 h
Rated lamp life time	1000 h

## Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes

## Capabilities

Dimmable	Yes
----------	-----

## Certificates &amp; standards

Energy efficiency class	E
Energy efficiency class	E
Energy consumption	15 kWh/1000h

## Country-specific categorizations

ILCOS	IBT/F-15-230-E14-26
-------	---------------------

## LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300003085	SPC.T FR 15 W 230 V E14	Shipping carton box 100	275 mm x 141 mm x 138 mm	5.35 dm <sup>3</sup>	1490.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.