


VIVA Multi 110

VIVA110-MULTI
SAP CODE: 2000509

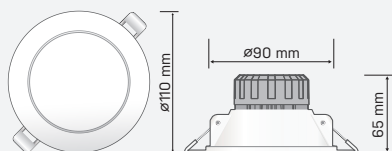

110mm, 9W, switchable colour temperature, flush diffuser, LED fixed downlight


A white trimmed LED downlight with flush opal diffuser that has a range of clip on trims - gold, brushed nickel and black. It can be dimmed and switched to three colour temperatures.

Accessories

ADAPTOR RING; CLIP-ON TRIM ROUND



Photometric Diagram

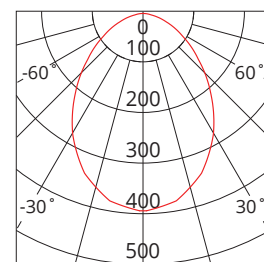

Unit: cd
- C0/180 80.0deg
- C90/270 80.0deg

KEY INFORMATION

| | |
|-------------------------|----------------------------|
| Lumen Output | 840 / 880 / 850lm |
| Input Power | 9W |
| Hole Cutout Size | Ø90mm |
| Install | RECESSED |
| Dimming Options | *Phase-Cut Dimming |
| Trim Colour | WHITE |
| Warranty | 4yr |
| IP Rating | IP44 |
| IK Rating | N/A |
| IC Rating | IC-4 |
| Rebate Scheme Approvals | VEET; REES; IPART LCP 8.72 |

PHOTOMETRIC

| | |
|------------|---------------------|
| Efficacy | 94 / 98 / 94lm/W |
| LED | SMD |
| CCT | 3000 / 4200 / 5700K |
| CRI | >80 |
| Beam Angle | 90° |

ELECTRICAL

| | |
|-----------------------------|-------------------|
| Driver | Integral |
| Supply Input | 220-240V, 50/60Hz |
| Driver Output Voltage | 72VDC |
| Power Factor | >0.9 |
| LED Input Current (nominal) | 125mA |
| Useful life @Ta25° (L70) | 50,000hr |

CONSTRUCTION

| | |
|---------------------------|---------------------------|
| Housing | Aluminium + Polycarbonate |
| Optics | Polycarbonate Diffuser |
| Adjustable Angle | N/A |
| Fixings/Hardware | Rubberised Clip |
| Connection Type | 1.1m Flex & Plug |
| Total Weight | 0.22kg |
| Dimensions | Ø110x65mm |
| Operating Ambient Temp. | -25 to 50°C |
| Electrical Classification | Class 2 |

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.