


METSEPM89M0024
PowerLogic PM8000 - I/O Module - Analogue - 4
inputs + 2 outputs

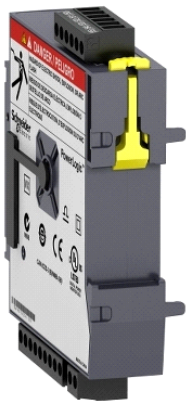

Main

| | |
|---------------------------|--|
| Range | PowerLogic |
| Product or component type | I/O module |
| Device application | Optional expansion module |
| Range compatibility | Powerlogic PowerLogic PM8000 Powerlogic PowerLogic ION7400 Powerlogic PowerLogic ION9000 |

Complementary

| | |
|-------------------|---------------------------------|
| Number of outputs | 2 analog, 4...20 mA or 0...10 V |
| Number of inputs | 4 analog, 4...20 mA or 0...30 V |
| Width | 22 mm |
| Depth | 90.5 mm |
| Height | 90.5 mm |
| Product weight | 140 g |

Environment

| | |
|---------------------------------------|----------------|
| ambient air temperature for operation | -25...70 °C |
| ambient air temperature for storage | -40...85 °C |
| IP degree of protection | IP30 IEC 60529 |

Offer Sustainability

| | |
|--------------------------|---|
| Sustainable offer status | Not Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1511 - Schneider Electric declaration of conformity |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.