

# Product Environmental Profile

## SAE 3 WIRE DMR + BLE SIDE CTRL CLIPSAL






## General information

<b>Representative product</b>	SAE 3 WIRE DMR + BLE SIDE CTRL CLIPSAL - 41EPBDWCLM-VW
<b>Description of the product</b>	It is an universal dimmer,using for opening,closing and dimming the room light.And could realize the control function with multi way,such as dimming the light with several switches installed in the room.
<b>Functional unit</b>	To open, close and dim different type of lighting loads for 10 years, e.g. LED lamps, incandescent lamps, Iron-core low voltage lighting loads; The mains working power level is 230-240VAC, the total load power could be up to 300VA; According to the modes of operation of the reference product,the consumed power in active phase(1% of full life time) is 3W,the consumed power in standby phase(99% of full life time) is 0.315W



## Constituent materials

**Reference product mass** 81.1 g including the product, its packaging and additional elements and accessories

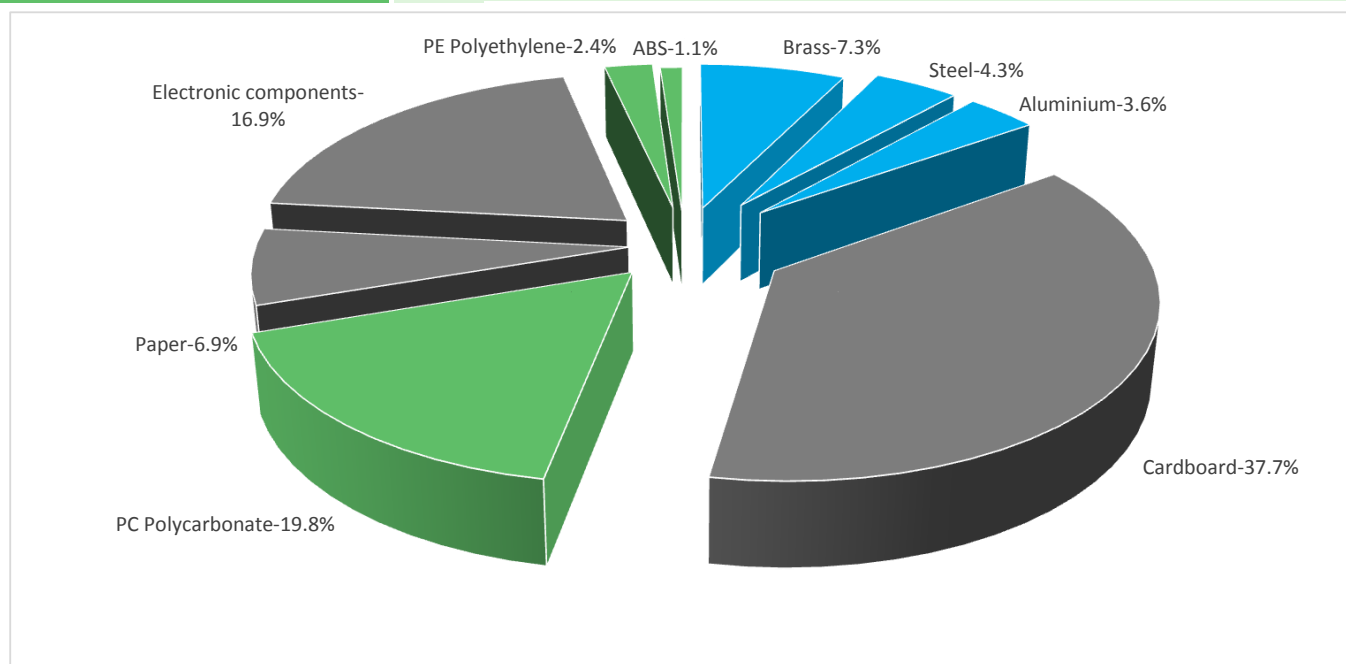

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


The SAE 3 WIRE DMR + BLE SIDE CTRL CLIPSAL presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 33 g, consisting of Cardboard(95%),PE bag(5%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Reference 41EPBDWCLM-VW does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Electronic card (13.97g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>69%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	The product is in active mode 1% of the time with a power use of 3W and in stand-by mode 99% of the time with a power use of 0.315W, for 10 years			
<b>Geographical representativeness</b>	Australia			
<b>Technological representativeness</b>	It is an universal dimmer,using for opening,closing and dimming the room light.And could realize the control function with multi way,such as dimming the light with several switches installed in the room.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity Mix; AC; consumption mix, at consumer; 220V; AU	Electricity Mix; AC; consumption mix, at consumer; 220V; AU	Electricity Mix; AC; consumption mix, at consumer; 220V; AU

Compulsory indicators		SAE 3 WIRE DMR + BLE SIDE CTRL CLIPSAL - 41EPBDWCLM-VW					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2,77E-04	2,72E-04	0*	0*	4,60E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2,86E-02	3,07E-03	4,80E-05	0*	2,54E-02	2,28E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	3,78E-03	1,55E-03	1,10E-05	0*	2,22E-03	7,34E-06
Contribution to global warming	kg CO <sub>2</sub> eq	1,24E+01	1,56E+00	1,05E-02	0*	1,08E+01	1,67E-02
Contribution to ozone layer depletion	kg CFC11 eq	2,06E-07	1,87E-07	2,13E-11	0*	1,82E-08	7,42E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,06E-03	2,87E-04	3,42E-06	0*	1,76E-03	2,27E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	4,42E+02	0*	0*	0*	4,42E+02	0*
Total Primary Energy	MJ	2,63E+02	1,99E+01	1,49E-01	0*	2,43E+02	1,09E-01

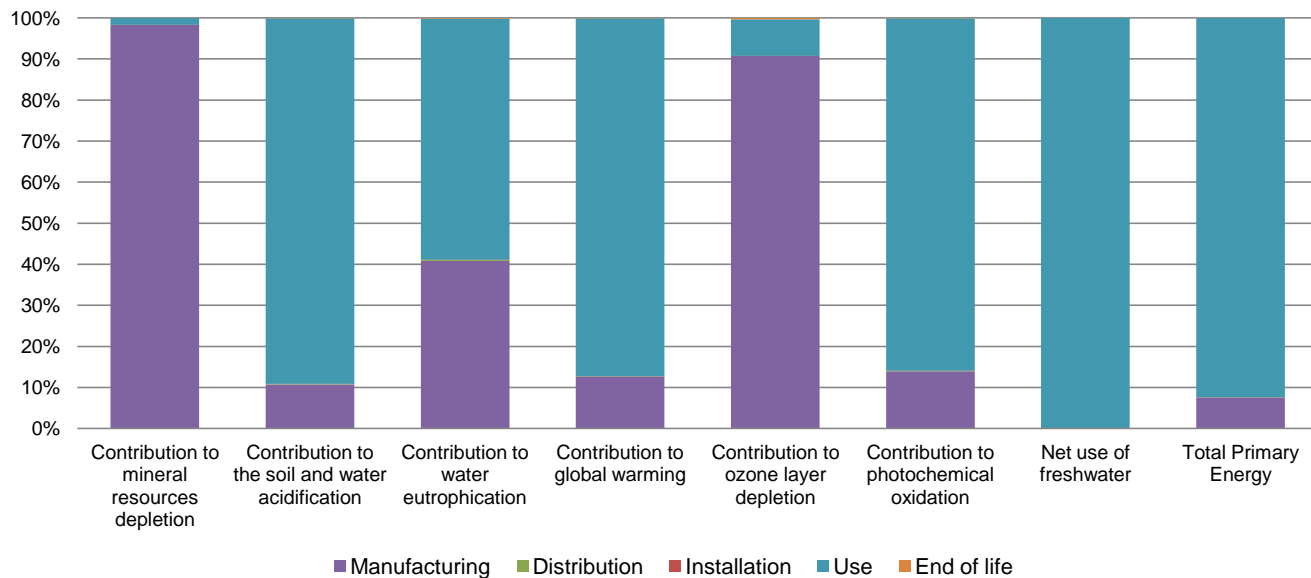

Optional indicators		SAE 3 WIRE DMR + BLE SIDE CTRL CLIPSAL - 41EPBDWCLM-VW						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	1,38E+02	1,88E+01	1,48E-01	0*	1,18E+02	1,00E-01	
Contribution to air pollution	m³	5,67E+02	1,68E+02	4,47E-01	0*	3,98E+02	7,75E-01	
Contribution to water pollution	m³	6,07E+02	1,58E+02	1,73E+00	0*	4,46E+02	1,09E+00	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	3,02E-03	3,02E-03	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	1,03E+02	1,32E+00	0*	0*	1,02E+02	0*	
Total use of non-renewable primary energy resources	MJ	1,60E+02	1,86E+01	1,48E-01	0*	1,41E+02	1,09E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,02E+02	5,77E-01	0*	0*	1,02E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	7,39E-01	7,39E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,59E+02	1,77E+01	1,48E-01	0*	1,41E+02	1,09E-01	
Use of non renewable primary energy resources used as raw material	MJ	8,56E-01	8,56E-01	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1,45E+00	1,33E+00	0*	1,49E-03	2,09E-02	9,58E-02	
Non hazardous waste disposed	kg	3,83E+01	4,68E-01	0*	0*	3,78E+01	0*	
Radioactive waste disposed	kg	9,34E-03	2,63E-04	0*	0*	9,08E-03	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	6,85E-02	8,54E-03	0*	1,29E-02	0*	4,70E-02	
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	3,21E-03	2,50E-05	0*	0*	0*	3,18E-03	
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1708008_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	08/2017	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP1708008\_V1

Published by Schneider Electric

© 2017 - Schneider Electric – All rights reserved

08/2017