



EXMOUTH S9522TC - 15/22W

Recessed 15/22 watt circular LED Shop light with selectable colour temperature and wattage

Application

Ideal for any retail or commercial interior spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch
- Twin 15/22W power selection with the integral DIP switch, IC-4 rated
- Durable die-cast aluminium body profile, with white or silver trim
- Constant current non-dimmable LED driver, with flex and plug
- Stylish powder coat finish with an opal polycarbonate diffuser
- High efficiency SMD LED chips



Performance

Dimmable - **OPTIONAL**
Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

Technical Specification


Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Beam Angle (°)	Dimmable
S9522TC WH	240	15/22	1500/2100	3000/4000/5500	100	OPTIONAL
S9522TC SL	240	15/22	1500/2100	3000/4000/5500	100	OPTIONAL

CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	iPART	REES
80	WHITE	160	184	55(H)	YES	YES
80	SILVER	160	184	55(H)	YES	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

S9522TC

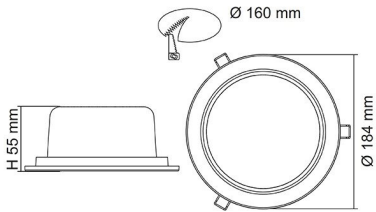

Photometric Data

Unit: cd C0/C180 — C90/C270 —



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

