





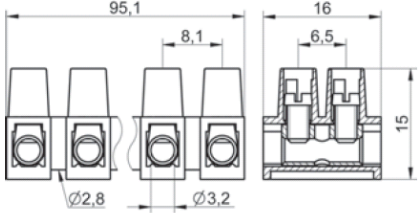






Técnica de conexiones

# TEKOX

Since 1976

MADE IN SPAIN

1804	<b>Voltage</b> 450V (600V UL)	<b>Current rating</b> 24A (20A UL)	 0,5 Nm	 M 3	 110°C	 ways	 200 pcs. 375x159x97 mm	 5 Kg
			 <p><b>SOLID CABLE</b> 2,5 mm<sup>2</sup> / 0,75 mm<sup>2</sup> (12 AWG)</p>	<p><b>1804 PH</b> wire protector PH (14 AWG / 15A UL)</p> 	4,84 Kg			
		 <p><b>STRANDED CABLE</b> 2,5 mm<sup>2</sup> / 0,75 mm<sup>2</sup> (12 AWG)</p>	<p><b>1804 TS</b> middle barrier TS</p> 	4,84 Kg				