


47915

auxiliary contact SDE - 6 A - 1 NO/NC - for
Masterpact NW

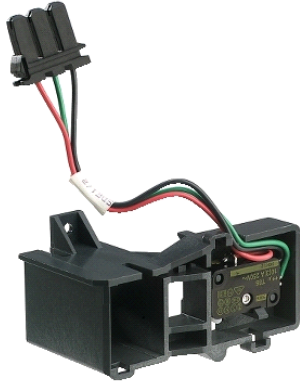

Main

Device short name	SDE
Product or component type	Auxiliary contact
Device application	Connection
Range compatibility	Masterpact - Masterpact NW circuit breaker
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
[I _{th}] conventional free air thermal current	6 A
[I _e] rated operational current	3 A AC-12 690 V AC 50/60 Hz 3 A DC-12 24/48 V DC 5 A AC-12 240/380 V AC 50/60 Hz 5 A AC-12 480 V AC 50/60 Hz 0.15 A DC-12 250 V DC 0.3 A DC-12 125 V DC
Minimum load	100 mA 24 V
Accessory / separate part category	Spare parts Masterpact NW

Environment

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.