

Main

Range of product	Magelis GTU
Product or component type	Base unit
Device short name	Premium Box
Processor name	CPU RISC 600 MHz
Operating system	Magelis
Software package	Vijeo Designer run time

Complementary

Range compatibility	Magelis GTU
Data storage equipment	1 GB SD card
Port Ethernet	10BASE-T/100BASE-TX/1000BASE-T
Type of cooling	Natural convection
Integrated connection type	USB 2.0 port mini B USB Auxiliary port terminal block Expansion unit fieldbus card Ethernet TCP/IP with 2 RJ45 COM1 serial link RJ45 RS485, transmission rate: 110...115200 bit/s COM1 serial link RJ45 RS485, transmission rate: 187.5 kbit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485, transmission rate: 110...115200 bit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485, transmission rate: 187.5 kbit/s USB 2.0 port with 2 USB type A
Communication port protocol	Modbus Modbus TCP/IP Uni-Telway
[Us] rated supply voltage	12...24 V DC power supply
Local signalling	Multi-colour LED for status
Depth	45 mm
Height	131 mm
Width	188 mm
Product weight	0.9 kg
Number of slots available for expansion	2 SD card

Environment

standards	UL 508 CSA C22.2 No 142 ANSI/ISA 12-12-01 CSA C22.2 No 213 class I division 2 IEC 61132-2
product certifications	CULus CE CCS EAC KC ATEX RCM CUL IEC-Ex GL ABS BV DNV

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

LR
RINA


pollution degree	2 conforming to EN 61131-2 Ed.3
electromagnetic compatibility	Electrostatic discharge immunity test EN/IEC 61000-4-2 level 3
ambient air temperature for storage	-20...60 °C
relative humidity	10...90 % non-condensing
ambient air temperature for operation	0...60 °C
operating altitude	2000 m
vibration resistance	3.5 mm constant amplitude 5...9 Hz conforming to EN/IEC 61131-2 9.8 m/s ² 9...150 Hz conforming to EN/IEC 61131-2
shock resistance	147 m/s ² conforming to EN/IEC 61131-2

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1347 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Dimensions

External Dimensions

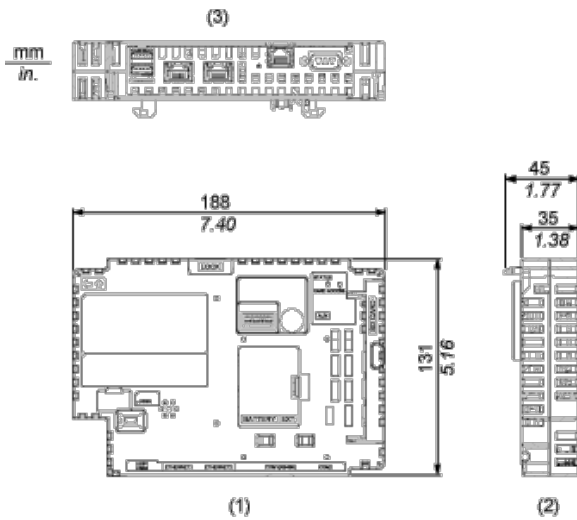

- 1 Front
- 2 Left
- 3 Bottom