

Main

Product or component type	Braking resistor
---------------------------	------------------

Complementary

Range compatibility	Altivar Easy 310 Altivar Process ATV900 Altivar Machine ATV320 Altivar Machine ATV340 Altivar Easy 310L
Product compatibility	Variable speed drive ATV930 wall mount 11 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 15 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 3 kW 200...240 V light cycle Variable speed drive ATV930 wall mount 4 kW 200...240 V light cycle Variable speed drive ATV950 wall mount 11 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 15 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 3 kW 200...240 V medium cycle Variable speed drive ATV930 wall mount 4 kW 200...240 V medium cycle Variable speed drive ATV340 7.5 kW 380...480 V light cycle Variable speed drive ATV340 11 kW 380...480 V light cycle Variable speed drive ATV320 2.2 kW 200...240 V Variable speed drive ATV320 3 kW 200...240 V Variable speed drive ATV320 7.5 kW 380...480 V Variable speed drive ATV320 11 kW 380...480 V Variable speed drive ATV320 7.5 kW 525...600 V Variable speed drive ATV320 11 kW 525...600 V Variable speed drive ATV320 15 kW 525...600 V Variable speed drive ATV310 11 kW Variable speed drive ATV930 15 kW 500...690 V light cycle Variable speed drive ATV930 18.5 kW 500...690 V light cycle Variable speed drive ATV930 20 hp 600 V light cycle Variable speed drive ATV930 25 hp 600 V light cycle Variable speed drive ATV310L 0.75 kW Variable speed drive ATV310L 1.5 kW Variable speed drive ATV310L 2.2 kW Variable speed drive ATV310L 3 kW Variable speed drive ATV310L 4 kW Variable speed drive ATV310L 5.5 kW
Duty cycle	Light cycle (heavy duty) : ≤ 0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) : ≤ 0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) : ≤ 4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) : ≤ 4 s braking with 165 % braking torque for a 40 s cycle
Average power available	0.3 kW at 50 °C
Ohmic value	28 Ohm
Electrical connection	Terminal, clamping capacity: ≤ 10 mm ² , AWG 8 for drive
Protection type	Thermal protection via drive
Width	175 mm
Height	345 mm
Depth	100 mm
Product weight	3 kg

Environment


ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...70 °C
IP degree of protection	IP20

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1533 - Schneider Electric declaration of conformity

Dimensions

Right Side and Front View

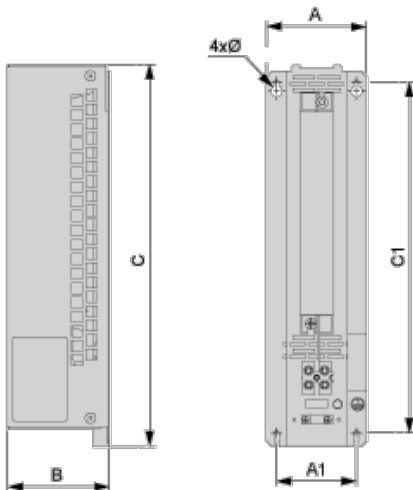


Dimensions in mm

A	B	C	A1	C1	Ø
175	100	345	142	316	4.5

Dimensions in in.


A	B	C	A1	C1	Ø
6.89	3.94	13.58	5.59	12.44	0.18

Mounting and Clearance

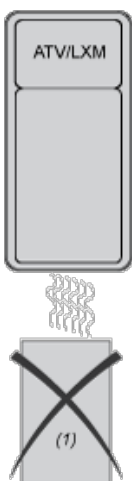


(1) Braking resistor

mm
in.

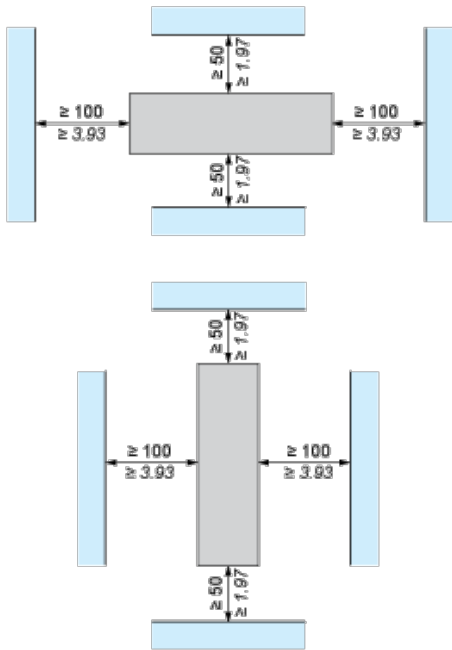

Recommended Schema

1 Braking Resistor



A1 : Drive or external braking unit

A2 : Braking resistor


PA, Bus DC

PB :

T1, Temperature control switch

T2 :

2 Braking Resistors

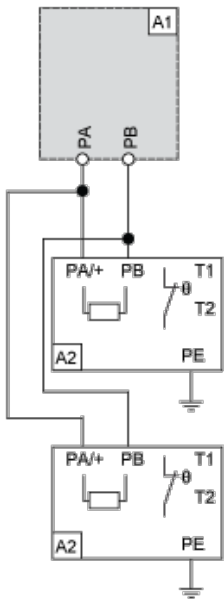

A1 : Drive or external braking unit

A2 : Braking resistor

PA, Bus DC

PB :

T1, Temperature control switch

T2 :