

## XZCPV12V12L2

pre-wired connectors XZ - elbowed female - M12 - 5 pins - cable PVC 2m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose


### Complementary

Electrical connection	M12, 5 pins elbowed female connector
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	2 m
Cable outer diameter	5.2 mm
Cable composition	5 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.09 kg

### Environment

IP degree of protection	IP65 IP67
product certifications	CULus
ambient air temperature for operation	-25...80 °C (static)
ambient air temperature for storage	-25...80 °C


### Dimensions

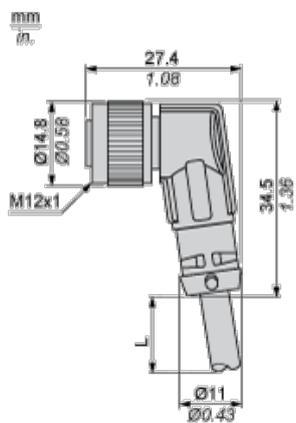

L : Length of cable

## Connections and Schemes

### Connectors



BU : Blue

BN : Brown

BK : Black

GY : Grey

BK/WH :Black / White