


## R63 & R80 LED GLOBES

- Input voltage: 240V AC 50/60Hz
- Aluminium Heatsink with thermal conductive plastic
- Diffuser: frosted PC
- LED chips: SMD2835 LED
- Power factor: 0.5
- Ambient temperature: -20 to 55°C
- Humidity 25+- 2°C ≤90%
- Not suitable for dimming

 15,000hr Lifetime	 IP20 Rated	 E27	 105° Beam Angle	 2YEAR Replacement Warranty
--	---	---	--	--

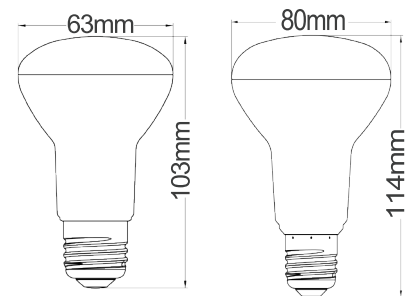

**R63**

**R80**

### TECHNICAL DATA

CODE	DESCRIPTION	LED CHIPS	BASE	KELVIN (K)	LUMENS (lm)	WATT (W)	CARTON QTY
R63L1B	LED R63 E27 3000K	7PCS	E27	3000	640	8=50	1/10/100
R63L2B	LED R63 E27 5000K	7PCS	E27	5000	640	8=50	1/10/100
R80L1B	LED R80 E27 3000K	9PCS	E27	3000	810	10=65	1/50
R80L2B	LED R80 E27 5000K	9PCS	E27	5000	810	10=65	1/50