

Stingray 2 LED Exit Light

STLED-L

- Ceiling mount and optional wall mount
- Complete with replaceable lithium iron phosphate (LiFeP04) battery
- Optional IP65 KIT (See datasheet for Aqualock)



Performance

System Power	5W
Exit Lumen	124lm
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Warranty	3 Years
Lifetime	50,000hrs (L70/B50)

Physical

Dimensions	L395 x W81 x H245mm
Diffuser	Acrylic
Luminaire Colour	White
Weight	1kg
Luminaire Material	Plastic (Acrylic)
Driver Location	Integrated
Finish	White
Installation	Ceiling Surface Mounted

Emergency

Emergency Version	Yes
Option	Maintained
Testing System	Manual
Battery	LiFePO4
Battery Voltage	3V
Battery Capacity	1500mA
Emergency Mode Wattage	1W
Emergency Mode Lumen	27lm
Classification	C0/C180:D3.2 C90/C270:E2 (2HR)
Viewing Distance	24m


Electrical

Voltage	240V
Electrical Rating	Class 1

AS/NZS 2293.1:2018 Classification Table

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)	
	C0/180	C90/C270
2.1	6.5	5
2.4	6.5	5.2
2.7	6.5	5.2

Line Drawings

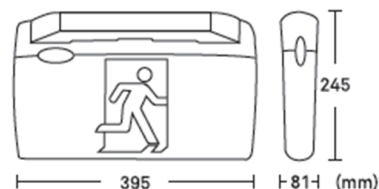

Accessories

BATPK1100/2L21	BATTERY LIFEP04 6.4V 1100MAH SBS 2CELLS / S PLUG 180MM
AQUALOCK-W	AQUALOCK W/PROOF EXIT ENCLOSURE WH/BASE
