


# CENTAURI 20/30

C20/30W230R-MULTI

SAP CODE: 2000576

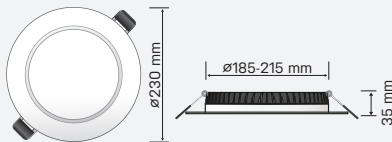


20/30W, dual intensity, three colour temperature LED shoplight

A versatile high output downlight with switchable colour temperatures and intensity.



Photometric Diagram



Unit: cd  
 - C0/180 95.0deg  
 - C90/270 95.0deg

## KEY INFORMATION

Lumen Output <sup>30W</sup>	3040 / 3130 / 3050lm
- Low Power Mode <sup>20W</sup>	2090 / 2250 / 2220lm
Input Power	30W
Hole Cutout Size	Ø185-215mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	VEET; REES; IPART LCP 30.06

## PHOTOMETRIC

Efficacy <sup>30W</sup>	101 / 104 / 102lm/W
- Low Power Mode <sup>20W</sup>	105 / 112 / 111lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	100°

## ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	36VDC
Power Factor	>0.9
LED Input Current (nominal)	700-500mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	1.2kg
Dimensions	Ø230x35mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.