


3043USBG

Clipsal Ionic - USB Charger - 3 sockets - mechanism & fixing frame vivid white

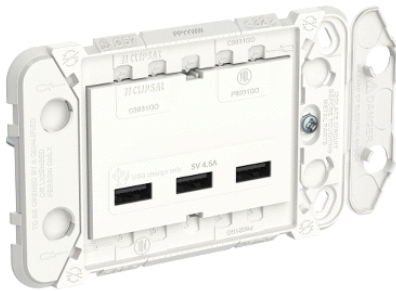

Main

Range	Clipsal Ionic
Product or component type	USB charger
[Ue] rated operational voltage	220/240 V AC 50 Hz
Integrated connection type	3xUSB 2.0 type A 5 V DC, maximum load current: 2.1 A
Output current	4.5 A

Complementary

Device mounting	Flush
Device presentation	Mechanism with fixing frame
Colour tint	Vivid white
Surface finish	Matt Textured
Fixing mode	By screws
Type of packing	Polybag
Sale per indivisible quantity	1
Ambient air temperature for operation	0...35 °C
Ambient air temperature for storage	0...60 °C
Relative humidity	5...90 %
Protection type	Short time short-circuit protection
Number of terminals	3 screw terminal
Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Clamping connection capacity	4 x 2.5 mm ² (stranded) 4 x 2.5 mm ² (flexible) 4 x 2.5 mm ² (rigid)
Wire stripping length	10 mm
Height	71 mm
Width	115 mm
Depth	5 mm
Embedding depth	35 mm

Environment

product certifications	RCM
------------------------	-----

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.