


# TRIPROOF

TRIPROOF20/40W12-TRI

SAP CODE: 2001168

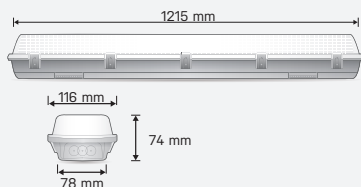


1200mm, 20W/40W,  
Tritone, rugged indoor/  
outdoor LED batten

A robust outdoor/indoor IK08  
vandal resistant LED batten  
with Tritone switchable colour  
temperature and Ecoswitch, a  
switch to select 20 or 40W.

Accessories  
SUSPENSION KIT



Photometric  
Diagram



Unit: cd  
- C0/180 110.0deg  
- C90/270 110.0deg

## KEY INFORMATION

Lumen Output <sup>40W</sup>	4090 / 4410 / 4050lm
- Low Power Mode <sup>20W</sup>	2230 / 2250 / 1970lm
Input Power	20 / 40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 41.29

## PHOTOMETRIC

Efficacy <sup>40W</sup>	102 / 110 / 101lm/W
- Low Power Mode <sup>20W</sup>	111 / 113 / 98lm/W
LED	SMD
CCT	4000 / 5000 / 6500K
CRI	>80
Beam Angle	120°

## ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	350-700mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Bracket
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1215x116x74mm
Operating Ambient Temp.	-30 to 65°C
Electrical Classification	Class 1
Food Grade Approval	HACCP