


CENTAURI 15/25

C15/25W190R-MULTI

SAP CODE: 2001087

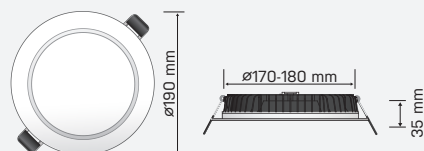


15/25W, dual intensity, three colour temperature LED shoplight

A versatile high output downlight with switchable colour temperatures and intensity.



Photometric Diagram



Unit: cd
 - C0/180 100.0deg
 - C90/270 100.0deg

KEY INFORMATION

Lumen Output ^{25W}	2500 / 2680 / 2640lm
- Low Power Mode ^{15W}	1470 / 1600 / 1610lm
Input Power	25W
Hole Cutout Size	Ø170-180mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	VEET; REES; IPART LCP 24.46

PHOTOMETRIC

Efficacy ^{25W}	100 / 107 / 106lm/W
- Low Power Mode ^{15W}	98 / 107 / 107lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	100°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	42VDC
Power Factor	>0.9
LED Input Current (nominal)	400-600mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1.2m Flex & Plug
Total Weight	9.6kg
Dimensions	Ø190x35mm
Operating Ambient Temp.	-20 to 55°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.