


SQUALE mini S4 for sealed connection up to 3 conductors and wire 4 mm² (x 8)

Quick repair of your damaged cables!

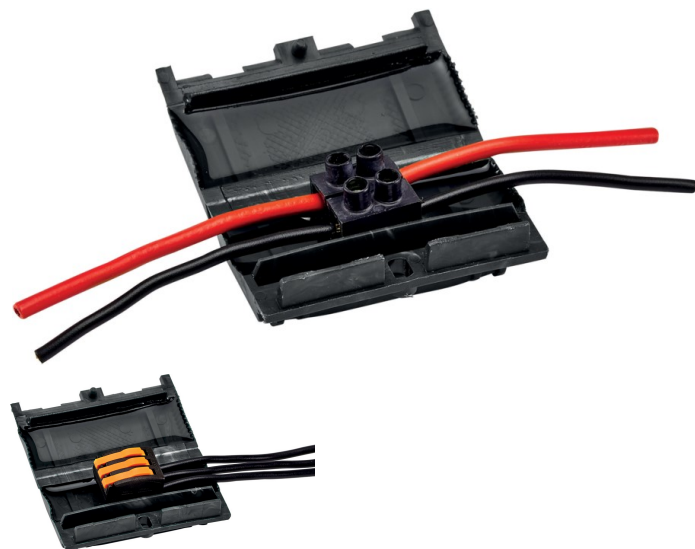

Characteristics

Capacity 1 conductor (mm²): **1-4**

Capacity 2 conductors (mm²): **1-4**

Dimensions (mm): **61 x 18**

Quantity per box : **8**

Norms

> IP X8

Benefits

- Quick repair of your damaged cables.
- Non toxic.

GENERAL INFORMATION

Description

Connector's sealing cover for wires with a section up to 4 mm².
Connection system not included.

Technical details

Contains neutral and non toxic insulating gel.
Installation temperature (°C) : -40 to +50.
Operating temperature (°C) : 90.

Application(s)

Ensures quick and safe sealing of your connections.
Ideal in outdoor, damp or immersed environments when it is a cable protected by the cable outer sheath installed in the SQUALE MINI (up to 3 m).
Ideal in outdoor and in a derivation box when wires are not protected by a cable outer sheath.

Instructions

1. Make your connection using a block or a connection terminal.
2. Insert your connection into the SQUALE MINI.
3. Close the SQUALE MINI, check that the gel slightly protrudes from the SQUALE MINI by winding the wires and/or the cable.

TECHNICAL DOCUMENT(S)

■ Technical documentation available on our website :



 SDS

 LOGISTIC INFORMATION

 Packaging



Carton box



Height (cm) : 11
 Length (cm) : 12
 Depth (cm) : 7
 Net weight (kg) : 0.28
 Gross weight (kg) : 0.28



 Outer package 1



Carton box

Height (cm) : 44
 Length (cm) : 50
 Depth (cm) : 38
 Net weight (kg) : 28
 Gross weight (kg) : 28.6





x 100.00

 Outer package 2



Pallet

Height (cm) : 105
 Length (cm) : 80
 Depth (cm) : 120
 Net weight (kg) : 228.8
 Gross weight (kg) : 260



x 800.00