


# SAU2501641N

Acti 9 Chassis - iC60 250A, 3Ph+N, 18mm, 16pole,  
Top Feed

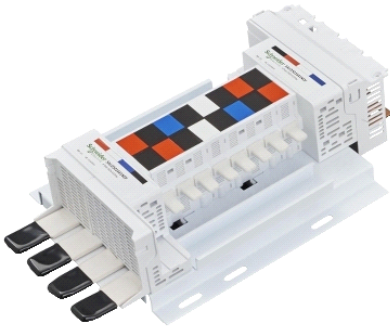

## Main

Range	Acti 9
Product or component type	Chassis
Device application	Distribution

## Complementary

Range compatibility	Acti 9 distribution board
Network type	AC
[In] rated current	250 A
Short-circuit withstand	25 kA for 0.1 s
Number of ways	1-incomer-3P + N
Number of poles	16 18 mm
Location of connection	Top
Length	146 mm
Width	215 mm
Busbar pitch	18 mm

## Environment

## Offer Sustainability

Sustainable offer status	Not Green Premium product
--------------------------	---------------------------

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.