


SOLAR CORRUGATED CONDUIT HD GREY

FEATURES

- Electro-insulating corrugated conduit
- UV Stabilized Grey
- Compression Strength $\geq 1250\text{N}$

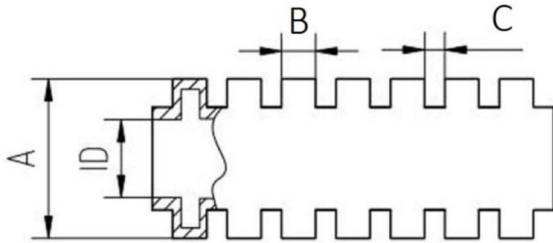

PRODUCT SPECIFICATION

| PART NO. | ID (mm) | A (mm) | B (mm) | C (mm) |
|----------|---------|-----------|--------|--------|
| CCS2050 | 15 | 19.8 ~ 20 | 2.5 | 1.5 |
| CCS2550 | 18 | 24.8 ~ 25 | 2.5 | 1.5 |

ORDERING INFORMATION

| PART NO. | DESCRIPTION | UNIT | QTY | SIZE (cm) | WEIGHT (kg) |
|----------|--|------|-----|----------------|-------------|
| CCS2050 | CORRUGATED CONDUIT SOLAR GREY 20MM X 50M | ROL | 1 | 40 x 40 x 20.5 | 6.0 |
| CCS2550 | CORRUGATED CONDUIT SOLAR GREY 25MM X 50M | ROL | 1 | 47 x 47 x 24 | 8.2 |

VERSION 2 11/19

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.