

LED Satellite Surface Mount – D63 

CAT. NO. 659504/LI, 659505/LI, 659506/LI, 659507/LI



659504/LI

Cat. No.	659504/LI, 659506/LI	659505/LI, 659507/LI
Finish	White	Black
Operating Mode	Non- Maintained	
Nominal Input Voltage	230 - 240 V a.c. 50Hz	
Battery	Li-ion 6.4 V, 3.0 Ah	
Power Consumption	2 W (Charge) / 0.7 W (Standby)	
Inrush Current	5 A peak	
Light Source Life (LSL)	100,000 hrs	
Body Constructions	Polycarbonate (Satellite head), Steel (Enclosure)	
Operating Temperature	10° C to 40° C	
IP Rating	IP20	
Compliance	AS/NZS 2293, AS/NZS 60598	
Product Marking	 	

LED Satellite Surface Mount – D63

CAT. NO. 659504/LI, 659505/LI, 659506/LI, 659507/LI



FEATURES

- iSmart™ temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery, minimising maintenance costs.
- Environment friendly battery.
- Easy to install.
- One high Brightness LED.
- SPU or Axiom options.
- 5 Year Warranty.
- Designed and Manufactured in Australia.

Cat. No.	Description	Classification C ₀ /C ₉₀
659504/LI	LED Satellite Surface Mount- White	D63
659505/LI	LED Satellite Surface Mount- Black	D63
659506/LI	Axiom LED Satellite Surface Mount- White	D63
659507/LI	Axiom LED Satellite Surface Mount- Black	D63

SPACING TABLE

Maximum spacings between luminaires for 0.2 lux (Australia)


Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	13.2	14.8	16.5	18.1	19.8	22.0
B	13.2	14.8	16.5	18.1	19.8	22.0

As per AS/NZS 2293:2018


Maximum spacings between luminaires for 1 lux (New Zealand)

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	11.5	11.8	12.1	12.3	12.5	12.7
B	11.5	11.8	12.1	12.3	12.5	12.7

As per AS/NZS 2293:2018

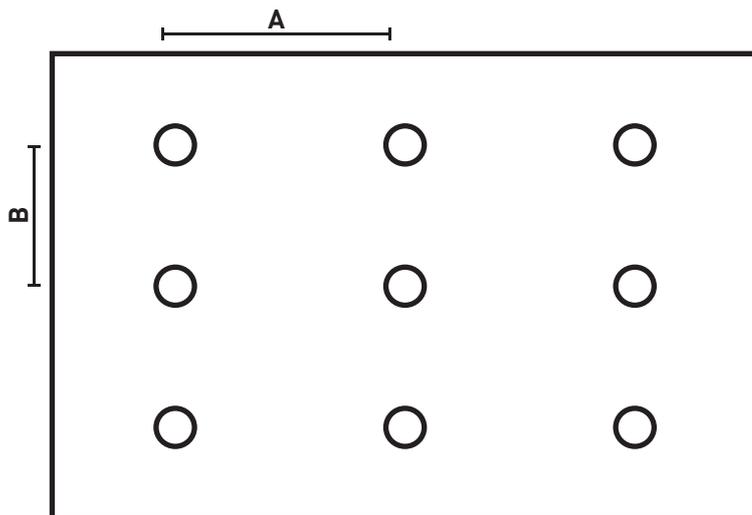

DIMENSIONS

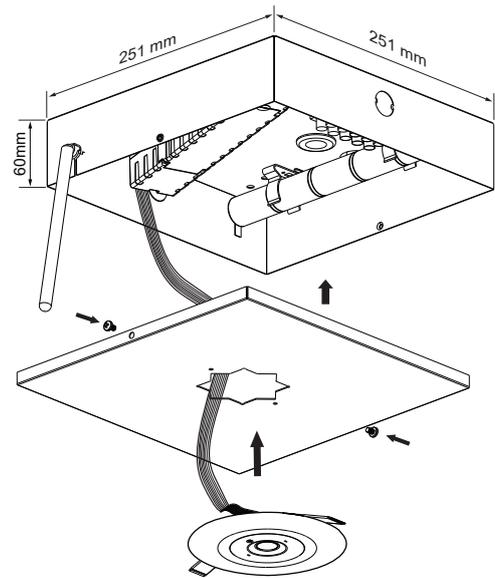

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.