

## ZB6CW4

red square flush illuminated pushbutton head Ø16  
spring return 12...24V



### Main

|                               |                                  |
|-------------------------------|----------------------------------|
| Range of product              | Harmony XB6                      |
| Product or component type     | Head for illuminated push-button |
| Product compatibility         | Integral LED                     |
| Device short name             | ZB6                              |
| Bezel material                | Plastic                          |
| Mounting diameter             | 16 mm                            |
| Sale per indivisible quantity | 1                                |
| Shape of signaling unit head  | Square                           |
| Type of operator              | Spring return                    |
| Operator profile              | Red flush unmarked               |

### Complementary


|                    |          |
|--------------------|----------|
| CAD overall width  | 18 mm    |
| CAD overall height | 18 mm    |
| CAD overall depth  | 33 mm    |
| Product weight     | 0.016 kg |

### Environment

|                                       |                                                                                                                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| protective treatment                  | TC                                                                                                                                                                                                                 |
| ambient air temperature for storage   | -40...70 °C                                                                                                                                                                                                        |
| ambient air temperature for operation | -25...70 °C                                                                                                                                                                                                        |
| electrical shock protection class     | Class II conforming to IEC 61140                                                                                                                                                                                   |
| IP degree of protection               | IP65 conforming to IEC 60529                                                                                                                                                                                       |
| NEMA degree of protection             | NEMA 13 conforming to UL 50<br>NEMA 4 conforming to UL 50<br>NEMA 4X conforming to UL 50<br>NEMA 4 conforming to CSA C22.2 No 94<br>NEMA 13 conforming to CSA C22.2 No 94<br>NEMA 4X conforming to CSA C22.2 No 94 |
| standards                             | EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-5<br>JIS C 4520<br>JIS C 852<br>UL 508<br>CSA C22.2 No 14                                                                                                     |
| product certifications                | CCC<br>CSA<br>GOST<br>UL                                                                                                                                                                                           |
| vibration resistance                  | +/- 3 mm (f = 2...500 Hz) conforming to IEC 60068-2-6<br>5 gn (f = 2...500 Hz) conforming to IEC 60068-2-6                                                                                                         |
| shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27                                     |


## Square Head for Illuminated or Non Illuminated Pushbutton

### Dimensions




## Panel Cut-out

### For Square or Circular Head




## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Front Panel Cut-out (Viewed from Installer's Side)

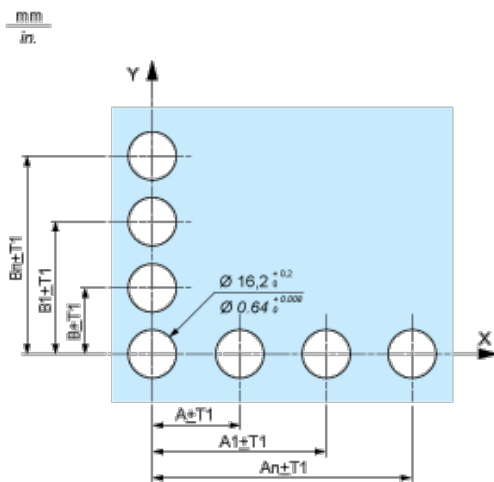

### Printed Circuit Board Drillings (Viewed from Electrical Block Side)

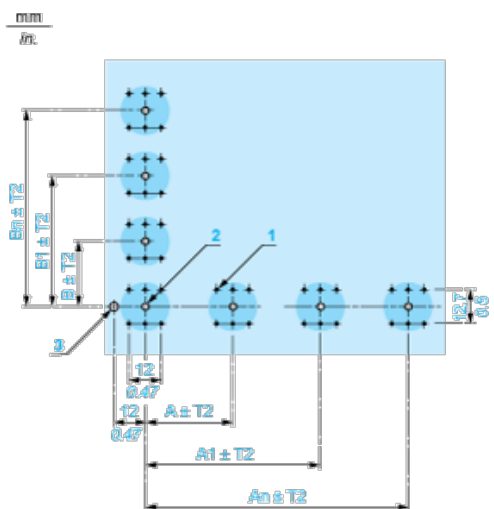

- A 24 mm/0.94 in. minimum for rectangular heads, 18 mm/0.71 in. minimum for square or circular heads
- B 18 mm/0.71 in. minimum
- (1) 6 x Ø 1.1 mm / 6 x Ø 0.04 in. holes.
- (2) 1 x Ø 2.6<sup>0</sup><sub>-0.2</sub> mm / 1 x Ø 0.10<sup>0</sup><sub>-0.008</sub> in. hole for locating pin, only when using socket adaptor ZB6Y010.

- (3)  $1 \times \varnothing 3.2^{+0}_{-0.2}$  mm /  $1 \times \varnothing 0.13^{+0}_{-0.008}$  in. hole for fixing of printed circuit board onto the front panel using body bracket ZB6Y011. This hole must be drilled on the left-hand side, when heads are positioned at the normal angle. Fit a body bracket ZB6Y011 every 72 mm/2.83 in. maximum for cut-outs on 24 mm/0.94 in. centres (rectangular heads) and 54 mm/2.13 in. maximum for cut-outs on 18 mm/0.71 in. centres (square or circular heads).


**General tolerances of the panel and printed circuit board: T1, T2:  $T1 + T2 = 0.3$  mm/0.01 in. maximum.**

#### Installation precautions:

Thickness of printed circuit board: 1.6 mm/0.06 in. minimum.


#### Mounting with Body Bracket

With socket adaptor ZB6Y010

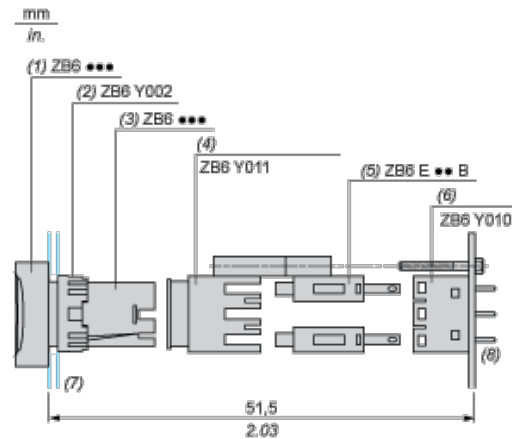

- (1) Head
- (2) Nut
- (3) Body
- (4) Body bracket
- (5) Contact block
- (6) Socket adaptor
- (7) Panel
- (8) Printed circuit

**Direct mounting without socket adaptor ZB6Y010**

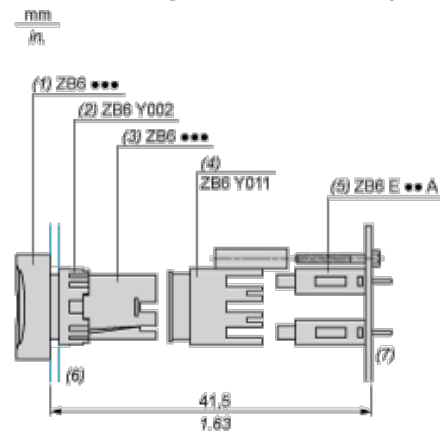

- (1) Head
- (2) Nut
- (3) Body
- (4) Body bracket
- (5) Contact block
- (6) Panel
- (7) Printed circuit