



Main

Range of product	Altivar Lexium
Product or component type	Braking resistor
Range compatibility	Lexium 05 Lexium 15 Altivar 32 Lexium 32 Lexium 32i Lexium 28 Lexium 52 Altivar Machine ATV320
Product compatibility	ATV32HU55N4 ATV32HU75N4 Variable speed drive ATV320 motor at 5.5 kW, 380...500 V, three phase Variable speed drive ATV320 motor at 7.5 kW, 380...500 V, three phase Variable speed drive ATV320 motor at 5.5 kW, 525...600 V, three phase Variable speed drive ATV320 motor at 7.5 kW, 525...600 V, three phase
Ohmic value	27 Ohm
Continuous power	400 W
Average power available	100 W at 50 °C
Cable length	3 m

Complementary


Energy peak	10500 J at 480 V 11400 J at 400 V 18100 J at 230 V 25500 J at 115 V
Protection type	Thermal protection via the servo drive
Product weight	1.62 kg

Environment

ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...85 °C
IP degree of protection	IP65
IP degree of protection	IP65

Braking Resistor

Dimensions

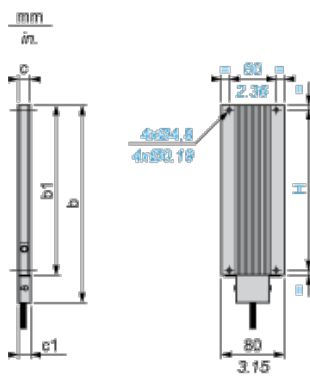

Dimensions in mm

b	b1	c	c1	H
257	216	30	—	204

Dimensions in in.

b	b1	c	c1	H
10.11	8.50	1.18	—	8.03