



Main

|                                    |                      |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory    |
| Accessory / separate part type     | Pre-wired connectors |
| Series name                        | General purpose      |

Complementary

|                                |                                     |
|--------------------------------|-------------------------------------|
| Electrical connection          | M12, 5 pins straight male connector |
| Cable connector fixing         | Screw-on                            |
| Collar material                | Metal                               |
| Status LED                     | Without                             |
| Cable length                   | 5 m                                 |
| Cable outer diameter           | 5.2 mm                              |
| Cable composition              | 5 x 0.25 mm <sup>2</sup>            |
| Wire insulation material       | PVC                                 |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                |
| [In] rated current             | 3 A                                 |
| Contact resistance             | 5000 µOhm                           |
| Insulating resistance          | 1 GΩ                                |
| Product weight                 | 0.18 kg                             |


Environment

|                                       |                      |
|---------------------------------------|----------------------|
| IP degree of protection               | IP65<br>IP67         |
| product certifications                | CULus                |
| ambient air temperature for operation | -25...80 °C (static) |
| ambient air temperature for storage   | -25...80 °C          |

Offer Sustainability

|                          |                                                                       |
|--------------------------|-----------------------------------------------------------------------|
| Sustainable offer status | Not Green Premium product                                             |
| RoHS (date code: YYWW)   | Compliant - since 1201 - Schneider Electric declaration of conformity |


Dimensions

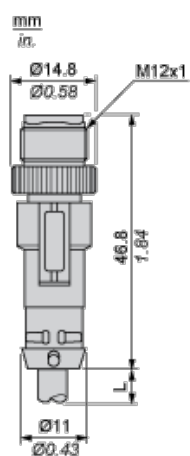

L : Length of cable

## Connections and Schemes

### Connectors



BU : Blue

BN : Brown

BK : Black

Y/G : Yellow / Green

BK/WH : Black / White