



Main

Product or component type	Passive filter
Product specific application	Reduction of current harmonics

Complementary

Range compatibility	Altivar 61 Altivar 71 Altivar Process ATV600 Altivar Process ATV900
[Us] rated supply voltage	400 V (+/- 10 %)
Supply frequency	50 Hz (tolerance: +/- 2 %)
Quantity per drive	1 filter per drive for variable speed drive ATV61W motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV61H motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV71H motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV71W motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV650 wall mount, motor: 22 kW / 30 hp 1 filter per drive for variable speed drive ATV630 wall mount, motor: 22 kW / 30 hp 1 filter per drive for variable speed drive ATV950 wall mount, motor: 22 kW / 30 hp 1 filter per drive for variable speed drive ATV930 wall mount, motor: 22 kW / 30 hp 1 filter per drive for variable speed drive ATV650 wall mount, motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV630 wall mount, motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV950 wall mount, motor: 30 kW / 40 hp 1 filter per drive for variable speed drive ATV930 wall mount, motor: 30 kW / 40 hp
[In] rated current	58 A for input 60 A for output
Network number of phases	3 phases
THDI	5 % for variable speed drive ATV650 motor: 22 kW / 30 hp 5 % for variable speed drive ATV630 motor: 22 kW / 30 hp 10 % for variable speed drive ATV61H motor: 30 kW / 40 hp 10 % for variable speed drive ATV71H motor: 30 kW / 40 hp 10 % for variable speed drive ATV71W motor: 30 kW / 40 hp 5 % for variable speed drive ATV61W motor: 30 kW / 40 hp 5 % for variable speed drive ATV650 motor: 30 kW / 40 hp 5 % for variable speed drive ATV630 motor: 30 kW / 40 hp 5 % for variable speed drive ATV950 motor: 22 kW / 30 hp 5 % for variable speed drive ATV930 motor: 22 kW / 30 hp 5 % for variable speed drive ATV950 motor: 30 kW / 40 hp 5 % for variable speed drive ATV930 motor: 30 kW / 40 hp
Max current	1.5 x nominal current (duration = 60 s)
Efficiency	<= 98 %
Thermal losses	574 W
Cos phi	1 at 150 % of line current 0.85 at 75 % of line current 0.99 at 100 % of line current
Electrical connection	A, B terminal, connection capacity: 2.5 mm ² X1-1...X2-3 terminal, connection capacity: 2.5...50 mm ²
Electrical insulation class	Class F
Product weight	76 kg


Environment

IP degree of protection	IP20 IP55 (enclosure mounting)
vibration resistance	2 mm peak to peak (f = 5...13.2 Hz) conforming to EN 60068-2-6 0.7 gn (f = 13.2...150 Hz) conforming to EN 60068-2-6
relative humidity	5...85 % without condensation
ambient air temperature for operation	> 45...60 °C with current derating 3 % per °C 5...45 °C without current derating
ambient air temperature for storage	> -25...55 °C storage in original packaging > -25...65 °C during transport
operating altitude	<= 1000 m without current derating > 1000...4000 m with current derating 5 % per 1000 m
standards	EN/IEC 61000-3-2 EN/IEC 61000-3-12 EN/IEC 61000-3-4 EN/IEC 61000-2-2 EN/IEC 61000-2-4 G5/4 engineering recommendation

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1329 - Schneider Electric declaration of conformity

Dimensions

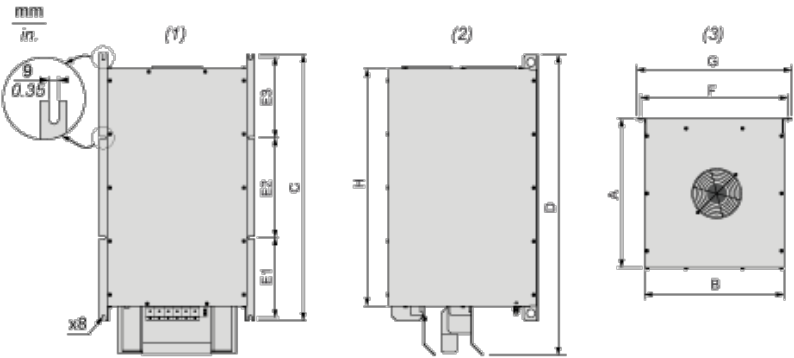

- (1) Front view
- (2) Right side view
- (3) Top view

Dimensions in mm


A	B	C	D	E1	E2	E3	F	G	H
333	330	577	623.6	156.5	240	156.5	353	378	490

Dimensions in in.

A	B	C	D	E1	E2	E3	F	G	H
13.11	12.99	22.72	24.55	6.16	9.45	6.16	13.90	14.88	19.29


Mounting Recommendations

Vertical Mounting Only
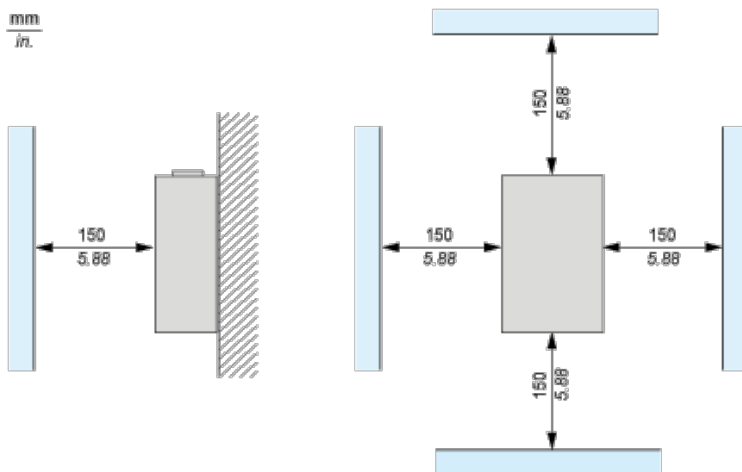
$$\frac{mm}{in}$$


(1) Filter

Recommended Schema

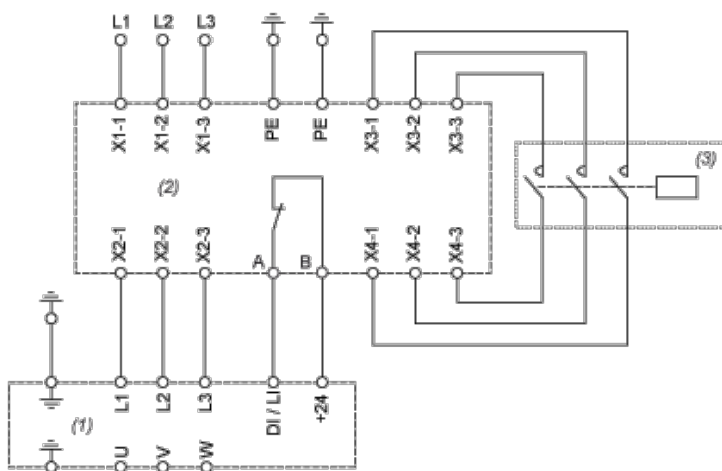

- (1) Drive
- (2) Filter
- (3) Optional