


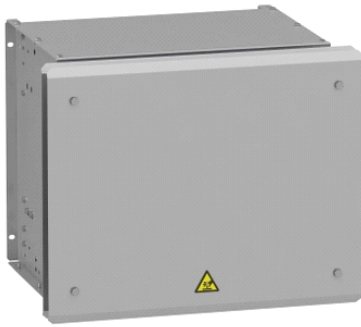

Main

Product or component type	Braking resistor
---------------------------	------------------

Complementary

Range compatibility	Altivar Process ATV900 Altivar Machine ATV340
Product compatibility	Variable speed drive ATV930 wall mount 11 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 15 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 4 kW 200...240 V severe cycle Variable speed drive ATV950 wall mount 11 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 15 kW 380...480 V severe cycle Variable speed drive ATV340 7.5 kW 380...480 V severe cycle Variable speed drive ATV340 11 kW 380...480 V severe cycle Variable speed drive ATV930 15 kW 500...690 V severe cycle Variable speed drive ATV930 18.5 kW 500...690 V severe cycle Variable speed drive ATV930 20 hp 600 V severe cycle Variable speed drive ATV930 25 hp 600 V severe cycle
Duty cycle	Severe cycle (heavy duty) : 54 s braking with 100 % braking torque for a 120 s cycle Severe cycle (heavy duty) : 6 s braking with 165 % braking torque for a 120 s cycle
Average power available	5.1 kW at 50 °C
Ohmic value	28 Ohm
Electrical connection	Terminal, clamping capacity: <= 2.5 mm², AWG 12 for temperature control switch M6 bar wire for drive
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	540 mm
Height	485 mm
Depth	650 mm
Product weight	25 kg

Environment


ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...70 °C
IP degree of protection	IP23

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1533 - Schneider Electric declaration of conformity

Dimensions

Right Side and Front View

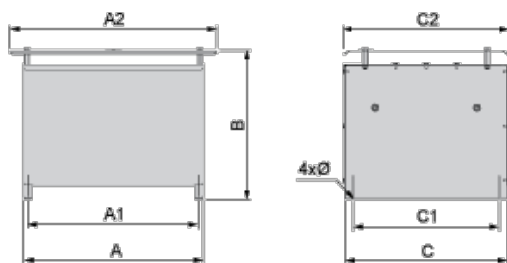


Dimensions in mm

A	B	C	A1	C1	A2	C2	Ø
530	485	485	510	380	650	540	9 x 12

Dimensions in in.


A	B	C	A1	C1	A2	C2	Ø
20.87	19.09	19.09	20.08	14.96	25.59	21.26	0.35 x 0.47

Clearances

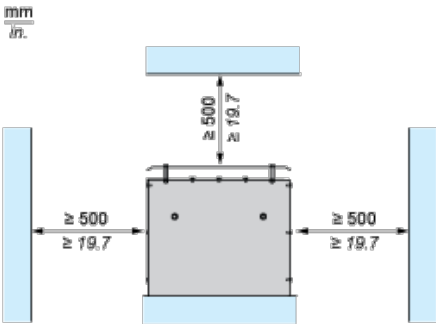


Recommended Schema

1 Braking Resistor



- A1 : Drive or external braking unit
- A2 : Braking resistor
- PA, Bus DC
- PB :
- T1, Temperature control switch
- T2 :

2 Braking Resistors

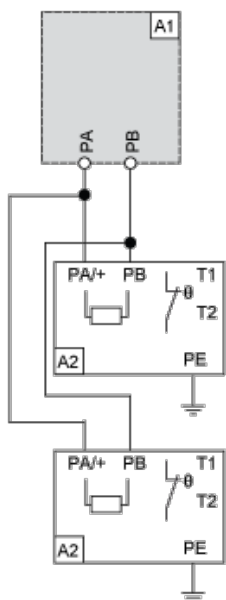

A1 : Drive or external braking unit

A2 : Braking resistor

PA, Bus DC

PB :

T1, Temperature control switch

T2 :