



## Main

Product or component type	Braking resistor
---------------------------	------------------

## Complementary

Range compatibility	Altivar Process ATV900 Altivar Machine ATV340
Product compatibility	Variable speed drive ATV930 wall mount 37 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 45 kW 380...480 V severe cycle Variable speed drive ATV930 wall mount 90 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 37 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 45 kW 380...480 V severe cycle Variable speed drive ATV950 wall mount 90 kW 380...480 V severe cycle Variable speed drive ATV340 30 kW 380...480 V severe cycle Variable speed drive ATV340 37 kW 380...480 V severe cycle Variable speed drive ATV340 75 kW 380...480 V severe cycle 2 per drive Variable speed drive ATV930 45 kW 500...690 V severe cycle Variable speed drive ATV930 55 kW 500...690 V severe cycle Variable speed drive ATV930 60 hp 600 V severe cycle Variable speed drive ATV930 75 hp 600 V severe cycle
Duty cycle	Severe cycle (heavy duty) : 54 s braking with 100 % braking torque for a 120 s cycle Severe cycle (heavy duty) : 6 s braking with 165 % braking torque for a 120 s cycle
Average power available	19 kW at 50 °C
Ohmic value	10 Ohm
Electrical connection	Terminal, clamping capacity: <= 2.5 mm², AWG 12 for temperature control switch M12 bar wire for drive
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	540 mm
Height	1035 mm
Depth	860 mm
Product weight	67 kg

## Environment


ambient air temperature for operation	0...50 °C
ambient air temperature for storage	-25...70 °C
IP degree of protection	IP23

## Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1533 - Schneider Electric declaration of conformity

## Dimensions

### Right Side and Front View

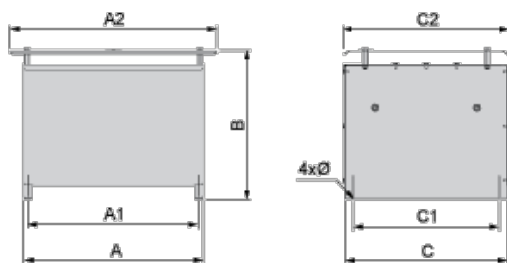

Dimensions in mm


A	B	C	A1	C1	A2	C2	Ø
740	1035	485	720	380	860	540	9 x 12

Dimensions in in.

A	B	C	A1	C1	A2	C2	Ø
29.13	40.75	19.09	28.35	14.96	33.86	21.26	0.35 x 0.47


## Clearances

mm  
in.

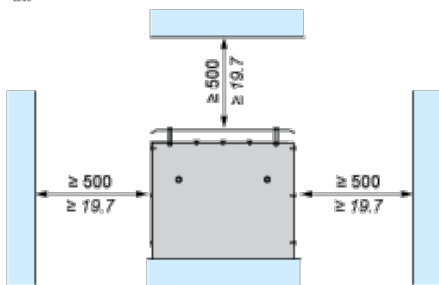

## Recommended Schema

### 1 Braking Resistor

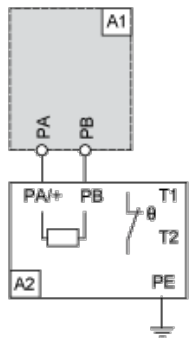

A1 : Drive or external braking unit

A2 : Braking resistor


PA, Bus DC

PB :

T1, Temperature control switch

T2 :

### 2 Braking Resistors

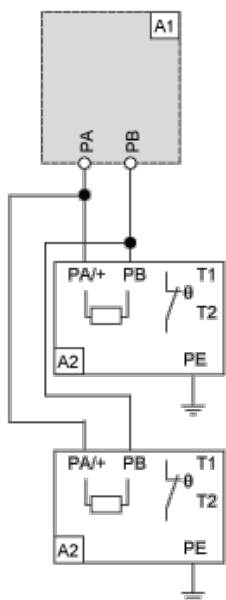

A1 : Drive or external braking unit

A2 : Braking resistor

PA, Bus DC

PB :

T1, Temperature control switch

T2 :