

BOXLITE EXIT



Conventional Exit for Quick Retrofits

The Boxlite is a conventional style LED exit with a detachable base plate that makes retrofitting on existing sites easy work.

Available as a wall or ceiling mount and supplied with all diffuser combinations in each box.




Applications

- | | |
|---|--|
|  Office Buildings |  Schools |
|  Factories |  Retail Outlets |
|  Car Parks |  Apartments |

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate battery



BOXLITE EXIT

ORDERING INFORMATION	EL CEILING MOUNT	EL WALL MOUNT
Standard	EBLLED-CM-LI	EBLLED-WM-LI
Clevertest Plus System Compatible	No	
Carton Quantity	5	
Weight - single (carton)	1.5kg (7.5kg)	
Dimensions (L x W x H)	375mm x 160mm x 240mm	375mm X 105mm X 160mm
Directional Options	All Directional Inserts Included	

POWER, LAMPS AND BATTERY	EL CEILING MOUNT	EL WALL MOUNT
Power Consumption (Standby / Max)	1.4W / 2.3W	
Lamp(s)	50,000 Hours LED	
Battery	Lithium Iron Phosphate	
Voltage (V) / Capacity (mAh)	3.2V / 1100mAh	
Charging Method	Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body / Diffuser	ABS / PC
Viewing Distance	24m
Mounting Type	Ceiling Single or Double Sided / Wall Single Sided
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20

SPARE PARTS	EL CEILING MOUNT	EL WALL MOUNT
Battery	1560200	1560200
Lamp Bar	8002715	8002715
Diffuser	EBLD-CM	EBLD-WM

ACCESSORIES	EL CEILING MOUNT	EL WALL MOUNT
Cantilever Bracket (Ceiling)	3562090	3562090
Wireguard (Wall Mount)	2530050	2530050
Wireguard (Ceiling Mount)	2530110	2530110


CLASSIFICATION	EL CEILING MOUNT	EL WALL MOUNT
Co	D3.2	E2
C90	D3.2	E2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	0.0
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

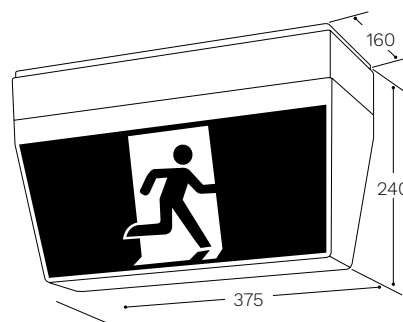

Dimensions (mm)
Ceiling Mount

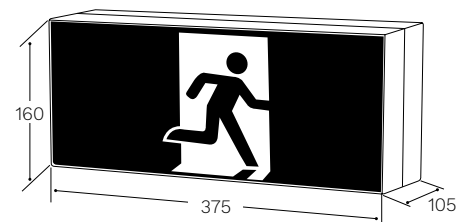

Dimensions (mm)
Wall Mount

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. CT-BRO-ANZ-BOXLITE-EX-002

