



WAVE S9066TC - 12W

Dimmable IP44 LED downlight with selectable CCT

Application

Ideal for any residential interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Poly covered aluminium body, IC - 4 rated, double insulated
- Opal polycarbonate diffuser
- Integral, trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips
- Deco ring options: Satin Nickel (S9066SN/RING), Black (S9066BK/RING)



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9066TC WH	240	12	1300/1450/1350	3000/4000/5700	90
	S9066SN/RING					
	S9066BK/RING					


Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	IPART
YES	80	WHITE SATIN NICKEL BLACK	125	145	66(H)	YES

REES	VEET
YES	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9066TC

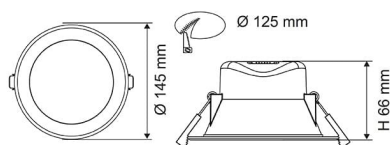

Photometric Data

Unit: cd C0/C180 C90/C270

