


ASCELLA CT

LED Batten

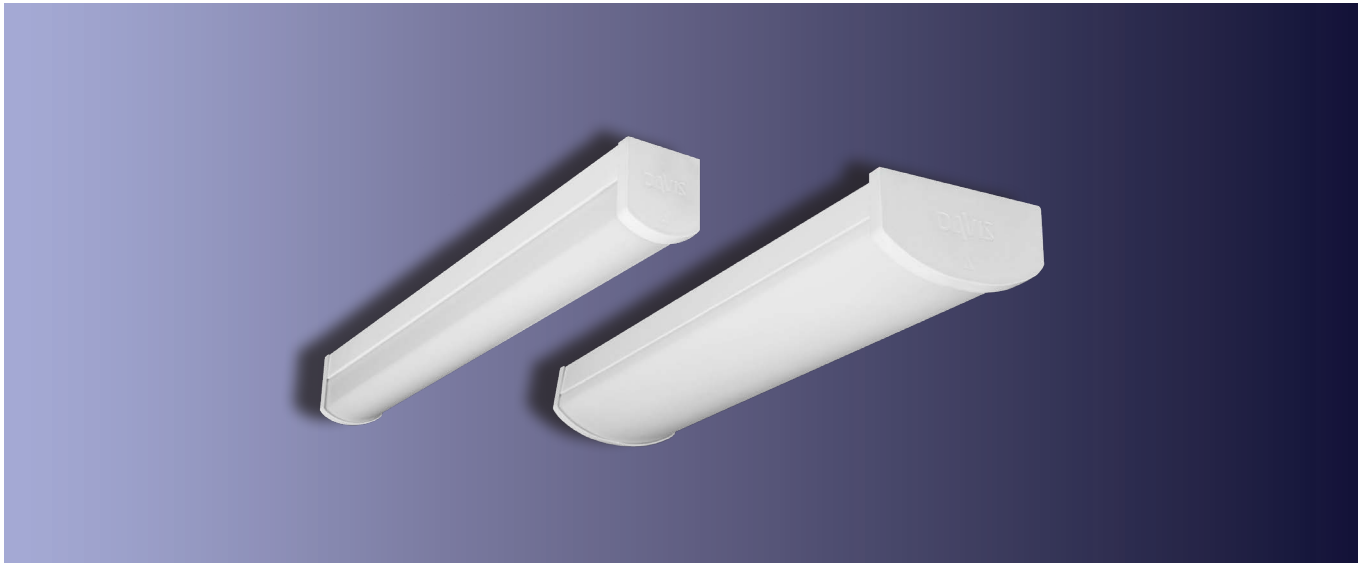

Model	ACS220CT	ACS420CT	ACS435CT	ACS550CT	ACW220CT	ACW420CT	ACW435CT	ACW550CT
Nominal Power (W)	20	20	35	50	20	20	35	50
Input Voltage	220 - 240 VAC 50 / 60 Hz				220 - 240 VAC 50 / 60 Hz			
Luminous Flux (lm)	2000	2000	3800	5000	2000	2000	3800	5000
Efficacy (lm/W)	111	111	111	104	111	111	111	104
CRI	> 80				> 80			
Power Factor	> 0.90				> 0.90			
Colour Temp. (K)	3000 / 4000 / 6500				3000 / 4000 / 6500			
LED Life L70B50 (hr)	> 50,000				> 50,000			
Ambient Temp. (Ta)	35 °C				35 °C			
Weight (kg)	0.70	1.25	1.25	1.60	1.00	1.80	1.80	2.40

■ Dimming, Sensor & Emergency version available upon request

FEATURES

- Colour temperature selectable
- PMMA opalised diffuser
- Metal housing with durable power-coating
- 50,000 hrs LED life
- Knockouts for in-line mounting
- Quick and easy installation

OPTIONALS



■ Dimmable



■ Sensor



■ Emergency

APPLICATIONS

- Domestic areas
- Hotels / Motels
- Offices
- Commercial interiors
- Showrooms, galleries
- Schools



Warm White



Cool White




Day Light

Manufactured under ISO 9001:2015 to standards


- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

LIGHTING DATA

■ ACS435CT


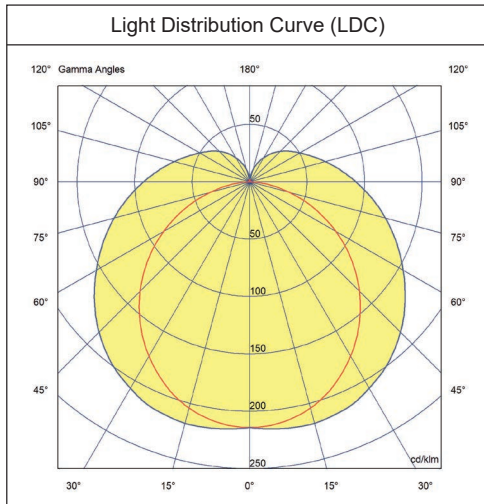


■ ACW435CT


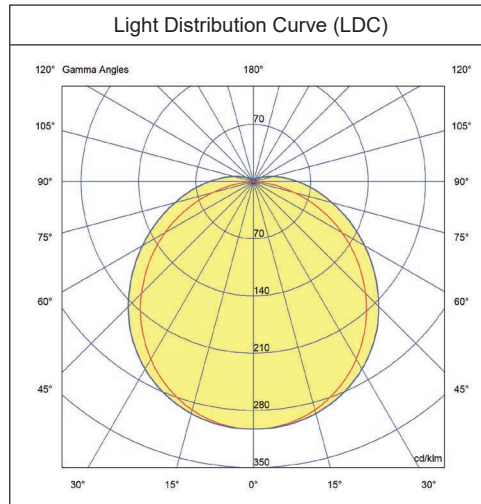


DIMENSIONS

■ ACS CT

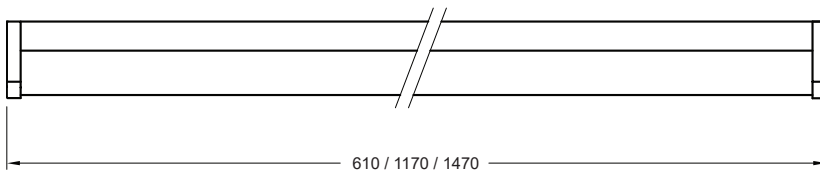

■ ACW CT

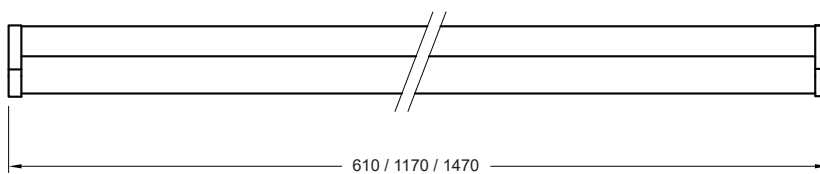

MOUNTING METHOD


■ Surface-mounted



CCT Selection Switch



Tri-Colour
Temperatures LED



Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.