


Catalogue No: **M6NC2-24-18-3-U**

CHASSIS M6NC MOD6 250A 24WAY 3P UNI

Power Distribution and Protection > Busbar, Chassis and Power Connections > Chassis > MOD6 Chassis > M6NC Chassis 250A - 3 Pole (18mm Pole Pitch) > Universal Fed

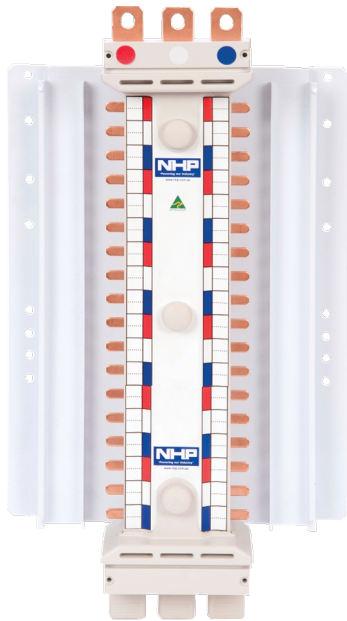

Representative Photo Only
(actual product may vary based on configuration selections)

- Complies with AS/NZS 61439, AS/NZS 3000 – 2018
- Main bar current rating 250A
- 3 pole (3 phase)
- Encapsulated busbar (no insulation coating required)
- Chassis main bars direct connect to 160A or 250A main switch saving space
- Tee-offs 12 to 96 pole
- Tee-offs 50% with caps
- Withstand ratings: 25 kA for 0.1 s, 20 kA for 0.3 s, 10 kA for 1.0 s
- IP20 touch protection for chassis 160 A and 250 A main switches
- IP20 touch protection for 250 A MCCB to chassis connection kits

SPECIFICATIONS

Product Series	NC
Chassis Type	Main Chassis
Compatible Product Series'	MOD6
Details, compatible Product Series	Suits MOD6 MCBs and RCDs
In, Rated Current	250 A
Tee-Off Direction	Left / Right
Split Chassis	No
Tee-Off Isolator	No
Capped Tee-Offs	50 %
Ue, Rated Operational Voltage, AC, max	415 V AC
Icw, Short Time Withstand Current, 100ms (rms)	25 kA, 100ms
Icw, Short Time Withstand Current, 300ms (rms)	20 kA, 300ms
Icw, short time withstand current, 1s (rms)	10 kA for 1s
Number of Poles	24
Output Phases	3P
Material, Body / Housing	Encapsulated material
IP Rating	IP20
Height, Cutout	219 mm
Height, Pan	242 mm
Width, Pan	250 mm
Depth	82 mm
Standards Compliance	AS/NZS 3000:2007 AS/NZS 61439.1


Catalogue No: **M6NC2-24-18-3-U**

CHASSIS M6NC MOD6 250A 24WAY 3P UNI

Power Distribution and Protection > Busbar, Chassis and Power Connections > Chassis > MOD6 Chassis > M6NC Chassis 250A - 3 Pole (18mm Pole Pitch) > Universal Fed



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

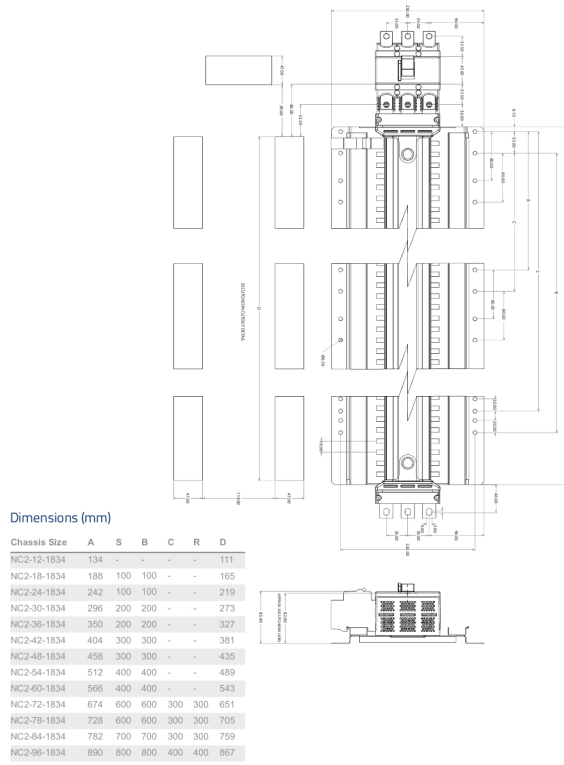

Dimension Diagram