



# Mini Orange®

## CONDENSATE REMOVAL PUMP

The world's best selling mini pump offers unrivalled reliability and performance.

12L/h max. flow

10m max. rec. head (flow rate 6L/h)



21dB(A) @ 1 m

### Key Features

- Submersible secondary reservoir included
- Plug & Play
- Anti siphon device

### Suitability

- Up to 16kW / 54,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- **Perfect for...** Small units

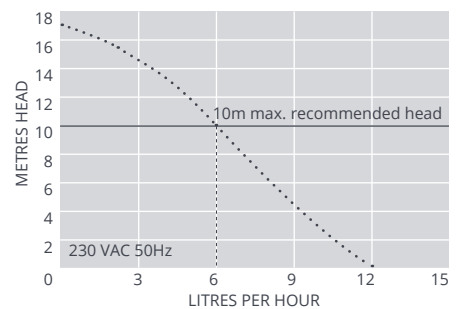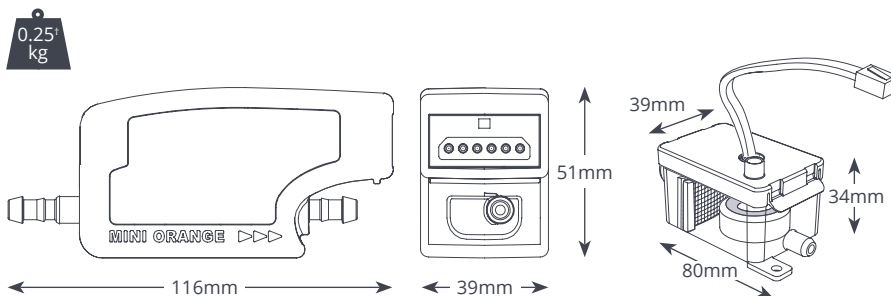

@ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	21dB(A)
Power supply	230 VAC, 50-60Hz, 0.11A, 16W
Rated	Non continuous
Class	II
Max. unit output	16kW (54,000 Btu/h)
Max. water temp	40°C (104°F)
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

OPTIONS	
Mini Orange	FP2212
† Pump only	

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
1 Amp Fuse		FP2620
Tube To Soil Stack Adaptor		FP2038
Vinyl Tube Braided 1/4" (6mm)		AX5100

Visit [aspenspumps.com](http://aspenspumps.com) for more installation accessories.

IN THE BOX
Mini Orange pump • 1.5m Plug & Play power cable • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)  
 Watch installation video at [aspenspumps.com](http://aspenspumps.com)