

CLEVERFIT EXIT



LED Exit Suitable for All Applications

The Cleverfit Exit is a proven market leader that is known for its reliability, energy efficiency and ease of installation. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications. The Cleverfit can be either wall or ceiling mounted and the quick connect bracket makes installation nice and easy.




Applications

- | | |
|---|--|
|  Office Buildings |  Schools |
|  Factories |  Retail Outlets |
|  Car Parks |  Theatres |

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.1W to 2.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

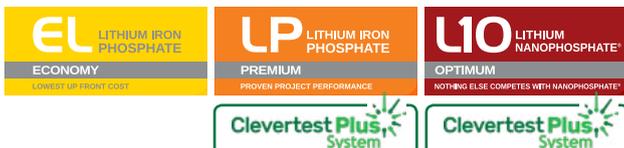

CLEVERFIT EXIT

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard	ECFLED-LI	CCFLED	LCFLED
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CCFLED-DALI	LCFLED-DALI
	Zoneworks® XT Hive	-	CCFLED-HV	LCFLED-HV
	Theatre Version	ECFLED-LI-TH	CCFLED-TH	LCFLED-TH
Carton Quantity	5 pieces			
Weight - single (carton)	1.2kg (6kg)	1.8kg (9kg)		
Dimensions (L x W x H)	355mm x 80mm x 215mm			
Directional Options	All Directional Inserts Included (Excluding theatre versions)			
Directional Options (Theatre Only)	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CCFLED-TH-DS-RR			

* for additional variants please refer to the Clevertronics Product Guide or website.

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	1.1W / 2.0W	2.7W / 5.1W	2.7W / 4.7W
Lamp(s)	50,000 Hour LEDs	100,000 Hour LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 600mAh	3.2V / 1500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body / Diffuser	ABS / PC
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20 (Weatherproof Version Available)

CLASSIFICATION	EL	LP	L10
C0	E2	E2.5	E2
C90	E2	E2	E2

SPARE PARTS	EL	LP	L10
Battery	1550195	1550190	1530090
Lamp Bar	8002900	8002120	8002430
DALI Node	-	8003060	8003060
Zoneworks®XT Hive Node	-	8003190	8003190
Diffuser	ECFD	ECFD	ECFD


ACCESSORIES	EL	LP	L10
Cantilever Bracket	CLVRBRT-CF-WP	CLVRBRT-CF-WP	CLVRBRT-CF-WP
Wireguard (Wall Mount)	2530053	2530053	2530053
Wireguard (Ceiling Mount)	2530110	2530110	2530110
Boxlite Cover Plate	3542250	3542250	3542250

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

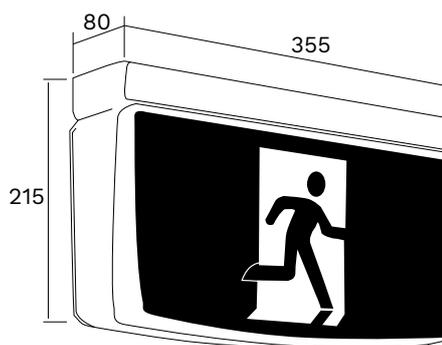

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice. CT-BRO-ANZ-CLEVERFIT-EX-001