




CLEVERTRONICS L10 OPTIMUM LIFELIGHT PRO RECESSED EMERGENCY (ZONeworks)

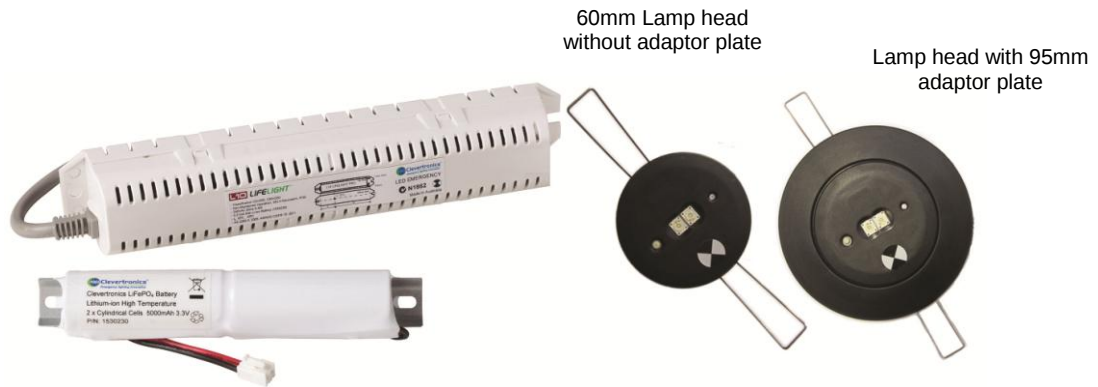

PRODUCT INFORMATION

Catalogue Number	LLIFE-PRO-ZW-BLK
Description	Lifelight PRO, High Performance, Recessed Emergency Light with Lithium Battery Technology
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 40mm x 40mm (Control Pack) , 60mm Head Diameter (95mm with adaptor plate)
Ceiling hole cut-out	51mm, 85mm (with adaptor plate)
Minimum ceiling depth	200mm, 120mm (with adaptor plate)
Operating Mode	Non-Maintained
Testing System	Zoneworks Computerised Testing
Charging Method	Intelligent current limited constant voltage charger
Lamps(s)	2 x 3W LED (Lifetime warranty on the lamp head and loom assembly) No dome cover required
Operating Voltage	240V 50Hz
Power Consumption	0.4W (standby) 2.2W (max during 16 hour charge)
IP Rating	IP20
Impact Rating	N/A
Operating Temperature	1° to 40°C (Ambient)
AS/NZ2293 Classification	C ₀ =D50 C ₉₀ =D50

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1100834	Lamps: 2 x 3W LED Round Head Assembly & Ring – Black
1530230	Battery: 3.3V 5Ah.Li-ion, 200mm lead with Bracket
LLIFE-PRO-CKIT	PCA: Lifelight Pro Control Gear
8001450	PCA: Zoneworks Powerline Node, #CT10310-A6

