

VANDAL RESISTANT EXIT



A Strong, Robust and Reliable Exit

The Vandal Resistant Exit is a high impact IK10 rated exit that utilises the Cleverfit PRO within a powder coated steel enclosure.


It provides an effective solution for prisons, correctional facilities, train stations and heavy industrial areas. It can be wall, ceiling or flag mounted with single or double-sided decals.

Applications

- | | |
|---|---|
|  Public Amenities |  Schools |
|  Stadiums |  Train Stations |
|  Car Parks |  Correctional Facilities |

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall, ceiling and flag mount options
- All directional decals in one box
- Lithium Nanophosphate® battery
- Clevertest Plus System compatible
- All test options available

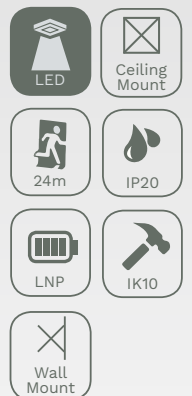

VANDAL RESISTANT EXIT

		L10		
ORDERING INFORMATION		CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED
PART NO.	Standard	LVELED-CM	LVELED-WM	LVELED-FM
	Clevertest Plus System Compatible	Yes		
	DALI	LVELED-CM-DALI	LVELED-WM-DALI	LVELED-FM-DALI
	Zoneworks® XT Hive	LVELED-CM-HV	LVELED-WM-HV	LVELED-FM-HV
Carton Quantity		1		
Weight - single (carton)		6.6kg		
Dimensions (L x W x H)		425mm x 100mm x 270mm		
Directional Options		All Directional Inserts Included		

POWER, LAMPS AND BATTERY		L10		
Power Consumption (Standby / Max)		3.6W / 5.6W		
Lamp(s)		100,000 hours		
Battery		Lithium Nanophosphate®		
Voltage (V) / Capacity (mAh)		3.3V / 2500mAh		
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	L10
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction	Cleverfit PRO Inside Powder Coated Metal Frame and PC Diffuser
Viewing Distance	24m
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20
Impact Rating (IK)	IK10

		L10		
SPARE PARTS	CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED	
Battery	1530030	1530030	1530030	
Lamp Bar	8002250	8002250	8002250	
DALI Node	8003060	8003060	8003060	
Zoneworks® XT Hive Node	8003190	8003190	8003190	
Diffuser	2360300	2360300	2360300	


		L10		
CLASSIFICATION	CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED	
Co	D3.2	D3.2	D3.2	
C90	E8	E8	E8	

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
E8	7.3	7.9	8.4	8.8	9.2	9.5	9.9	10.2	10.4

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.
Maximum allowed mounting height is 2.7m
but for exceptions see AS/NZS 2293.1.
Spacing classifications do not apply for
theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

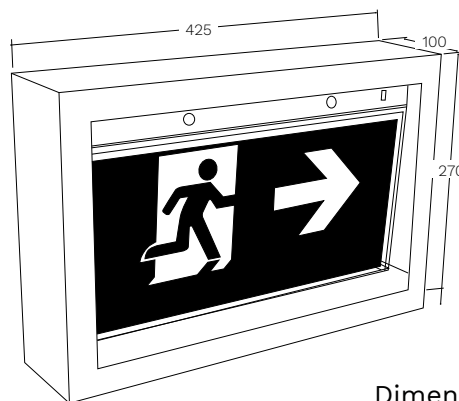

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

195 Chesterville Road, Moorabbin VIC 3189
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
CT-BRO-ANZ-VANDAL-EX-001